UNCLASSIFIED

AD NUMBER

AD474940

LIMITATION CHANGES

TO:

Approved for public release; distribution is unlimited. Document partially illegible.

FROM:

Distribution authorized to U.S. Gov't. agencies and their contractors;
Administrative/Operational Use; JUN 1965. Other requests shall be referred to Air Force Technical Applications Center, ATTN: TD-3, Washington, DC 20333. Document partially

illegible.

AUTHORITY

AFTAC ltr dtd 25 Jan 1972

SECURITY MARKING


The classified or limited status of this report applies to each page, unless otherwise marked.

Separate page printouts MUST be marked accordingly.

THIS DOCUMENT CONTAINS INFORMATION AFFECTING THE NATIONAL DEFENSE OF THE UNITED STATES WITHIN THE MEANING OF THE ESPIONAGE LAWS, TITLE 18, U.S.C., SECTIONS 793 AND 794. THE TRANSMISSION OR THE REVELATION OF ITS CONTENTS IN ANY MANNER TO AN UNAUTHORIZED PERSON IS PROHIBITED BY LAW.

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

BEST AVAILABLE COPY

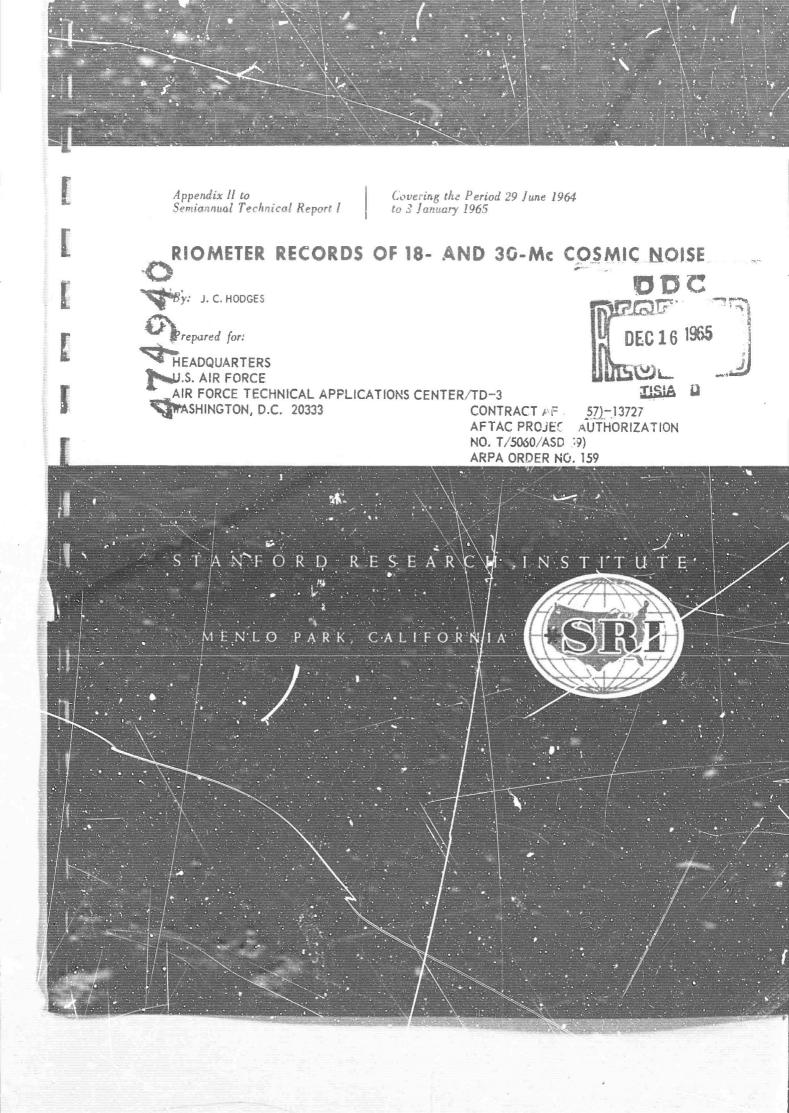



June 1965

Appendix II to Semiannual Technical Report 1 Covering the Period 29 June 1964 to 3 January 1965

RIOMETER RECORDS OF 18- AND 30-Mc COSMIC NOISE

Prepared for:

HEADQUARTERS
U.S. AIR FORCE
AIR FORCE TECHNICAL APPLICATIONS CENTER/TD-3
WASHINGTON, D.C. 20333
CONTRACT AF 33(657)-13727
AFTAC PROJECT AUTHORIZATION
NO. T/5060/ASD(59)
ARPA ORDER NO. 159

By: J. C. HOUGES

SRI Project 5224

This research was supported by the Project VELA office of the Advanced Research Projects Agency and monitored by the Air For Technical Applications Center.

Approved: RAY L. LEADABRAND, MANAGER RADIO PHYSICS LABORATORY

D. R. SCHEUCH, EXECUTIVE DIRECTOR ELECTRONICS AND RADIO SCIENCES

Copy No.

ABSTRACT

Riometer record reproductions of 18-Mc and 30-Mc cosmic noise are presented for the period 29 June 1964 to 3 January 1965. The riometers were located near San Francisco, California.

The riometer and the field site are described briefly and the use of the data is explained.

CONTENTS

ABSTRA	CT .	w (•			•		•	٠	•	•	•	•	٠	•	•		•	•	e					٠	11
I	INT	RODI	JCT IC	N			3			a				e			•			٠				•	٠		1
II	THE	RIC	OMETE	ER								•	•		٠		•			٠	*	٠					2
	Α,	Ger	neral	. De	esc	rip	ti	on			•	٠								٠			•	٠	٠		2
	B.	Qui	let-E	ау	Cu	rve						•		٠	•	٠	•	٠	•	•	9	٠			9	٠	3
	C.	Imp	porta	nt	Ri	ome	te:	r (Op:	ere	at:	in	g	p _a	raı	me	te	rs	•	•	•	•		•	٠		4
III	NUF	F CR	EEK,	CA	LII	POR:	NIA	1 5	II	Έ	•																6
	A.	Gen	eral	De	sc	cip	tic	n	49		*					,						•			4		6
	B.	30-	Mc R	1 on	ete	er							•			•	•		٠								6
	C.	18-	Mc R	iom	εte	er				Φ	•			•	٠	•	•	•	•	•	٠		•			٠	7
IV	DAT	Α.		•			•		•	9		•		•													8
	£.	Chr	onol	ogi	cal	L	og				e			٠													8
		1.	30-	Mc	Ric	me	ter	. (21/	II)							•			*							8
		2.	18-	Мc	Ric	me	ter	. (AR	I)																	9
	В.	Cha	rt R	eco	rds		ė																				10

I INTRODUCTION

As parc of the experimental studies of ionospheric variations being conducted at SRI, a ricmeter station has been operated continuously from 11 June 1963 at Nuff Creek--a ranch located in the hills near Half Moon Bay, California.

The riometer records taken at this station for the period 29 June 1964 to 3 January 1965 are reproduced in this volume to make them available to other researchers. These records are useful for comparison with other riometer records or correlation with other data concerning the sun, the earth's ionosphere, and radio astronomy. The riometer records are also useful as a routine source of information on the activity of the sun.*

^{*} Another source of similar geophysical data is the Monthly CRPL F-series, Part B, "Solar-Geophysical Data," available from the National Bureau of Stangards, Boulder, Colorado.

II RIOMETER

A. General Description

The word rioneter is derived from "relative ionospheric opacity meter." The riometer is an ultra-stable receiver system that records the power level of the cosmic noise impinging on the antenna coming primarily from our galaxy. This radio power, or radio noise, passes through the ionosphere. If the normal ionosphere is bombarded particles or intense radiations, additional ionization is generated which permits less cosmic noise to pass through the ionosphere, thus producing a noise-level drop on the riometer recording. A drop of the riometer record (usually referred to as absorption) implies that ionizing radiations, generally from the sun, are present.

Long-term stability of the riometer is achieved by using a servo system rather than a simple receiver. The riometer receiver alternately samples the power available from the antenna and from an internal noise generator (called the servo-noise diode) at a sample rate of 340 cps. An electronic servo system continuously adjusts the servo-noise diode power output to be equal to the noise power coming from the antenna. The data are recorded on a strip chart recorder in the form of servo-noise diode power output. Since this servo diode power output is made continuously equal to the antenna noise power, the recording effectively indicates the level of the cosmic signal reaching the antenna.

The noise-power output of a temperature-limited noise diode is directly proportional to the plate current of the diode, which is easily measured or recorded. To convert the plate current to equivalent temperature or power, the following equations are used:

$$T = 5.8 IR + T_{r}$$
 (1)

and P = kTB (2)

where

T = equivalent temperature in °K

I = noise-diode plate current in ma

R = resistance of the noise diode load resistor in ohms

 T_r = temperature of the noise diode load resistor in $^6{\rm K}$, which is approximately equal to room temperature. A value of $300^6{\rm K}$ is usually used.

P = noise power

k = Boltzman's constant, and

B = receiver bandwidth.

A useful way to express absorption is in terms of decibels. Since the plate current of the noise diode is proportional to the noise power output, the following equation may be used:

$$db = 10 \log \frac{I_1}{I_2}$$
 (3)

where

I, is the reference current, and

I is the current measured during an absorption event.

B. Quiet-Day Curve

The riometer chart recorder will trace out a sine-like curve each day representing the cosmic noise distribution as the antenna rotates with the earth. If the conditions are "normal," the curves of several days are used to determine a quiet-day curve. The usual prodecure is to operate the riometer for several days, and under "normal" circumstances the daily trace on the chart will receat that of the previous day, shifted forward in time by four minutes. The chart repeats itself because the antenna views the same solid angle of the sky at any given time each sidereal day. The daily 4-minute shift is the difference between sidereal time and solar time, and amounts to exactly one day each sidereal year.

Finally, the daily records can be compared to the quiet-day curve; if the recorded level is less than the quiet-day level, the ionospheric absorption can be measured quantitatively.

C. Important Riometer Operating Parameters

There are many adjustments on riometers that will affect the data quality. Two of the more important of these are adjustments to the receiver bandwidth and the integration time constant. These can be related to the ability of the riometer to measure a given noise power by:

$$\frac{\Delta P}{P} \ll \frac{1}{\sqrt{BT}}$$
 (4)

where

ΔP is the uncertainty in measuring P,

P is the measured power,

B is the receiver bandwidth (pre-detection), and

T is the integration time constant (post-detection).

the integration time constant, the smaller the uncertainty or trace width. Unfortunately, with wider bandwidths the riometer is more prone to interference; and with long integration time constants, the riometer is not able to respond to fast variations in absorption. In actual operation, a compromise must be made between these conditions. Two typical modern riometers which were used at the Nuff Creek Station and are described herein have the following available bandwidths and integration time constants:

	. Bandwidth					
	AR Ricae		1 -	MI neter		
	100	ke	50	ke		
-	30	kc	30	kc		
	15	kc	15	ke		
and the latest	3.5	ke	3.5	kc		

Integration T	ire Constant				
ARI Riometer	EMI Riometer				
2.5 sec 6 sec 16 sec 27 sec	2 sec 7 sec 20 sec				

The antenna used with the riometer is another important factor. If the antenna is filted it will see a different portion of the sky than an antenna looking directly overhead, thereby producing a slightly different quiet-day curve. Rotating an antenna with unequal E and H planes will also result in a different quiet-day curve for the same reason. Finally, the sum of the side lobes of many antennas can contribute almost as much power as the main lobe of the antenna; and, since each lobe looks at a different portion of the sky, a good deal more of the sky is covered than might be expected.

III NUFF CREEK, CALIFORNIA, SITE

A. General Description

The Nuff Creek site, operated by SRI, is located in a steep-sided a lley near Half Moon Bay (Lat. 37°30.6°N, Long. 122°1.8°W) several miles from any power lines or other sources of interference. The equipment is powered by batteries and propane thermoelectric generators. The batteries used with the 18-Mc riometer are charged for 1-1/2 days each week by a small gasoline generator and provide idequate power to operate one ARI riometer continuously. Two propane fuel cells will operate two riometers; the fuel consumption is approximately 40 gallons (200 lbs) per month.

The station at Nuff Creek is unmanned. A technician services the equipment weekly, spending approximately two hours at the site each visit. Time marks are placed on the records during the weekly servicing; these time marks are obtained directly from station WWV and have an accuracy of ±1 sec. Errors between the time marks and the chart time divisions are distributed linearly throughout the week unless obvious time errors are detected in the weekly data. Simultaneous interference bursts observed on the two frequencies often allow a crosscheck on the timing accuracy of the two recorders.

B. 30-Mc Richeter

The 30-Mc EMI riometer is a standard EMI Products, Inc.* instrument with a 3320-ohm servo-dicde load resistor. The recorder used is an Esterline-Angus pen recorder with a chart speed of 3 in per hour; full-scale deflection is adjusted to be 2.9 ma.

^{*} Now Western Electrodynamics, Inc. (WEI).

The antenna used with the EMI riometer is a Hygain three-element Yagi with an E-plane half-power beamwidth of 65 degrees and an H-plane half-power beamwidth of 110 degrees. The impedance of the antenna is 47 ohms. The antenna feedline is RG-8A/U cable with an estimated loss of 1 db. The antenna polarization was either parallel to the valley N59°E true (N42°E magnetic), or perpendicular to the valley as noted in the Chronological Log.

C. 18-Mc Riometer

The 13-Mc ARI riometer is an Aerospace Research Inc. Model 100-A instrument modified to have a 50-ohm servo-Giode load resistor, which requires attenuation in the antenna lead (see the Chronological Log below). The recorder used is an Esterline-Angus pen recorder with a charr speed of 3 inches per hour; the full-scale deflection is adjusted to 5.0 ma.

The antenna in use with the 18-Mc ARI riometer is a special sevenelement ring array designed for low sidelobe response. The antenna polarization is S147°E true. The beamwidth is approximately circular and 40 degrees between the naif-power points.* The antenna impedance is 59 ohms. The antenna feedline is RG-8A/U cable with an estimated loss of 2 db.

^{*} R. B. Dyce et al., "Cosmic Noise and Ionosphere Studies--Project VELA," Final Report, Part I, Contract AF 49(638)-989, SR1 Project 3498, Stanford Research Institute, Menlo Park, California (December 1963).

A. Chronological Log

1. 30-Mc Riometer (EMI)

The 30-Mc riometer had a slowly drifting quiet-day curve during this period, at first attributed to the servo diode. In March 1965, however, an examination of the riometer revealed a hidden antenna lead wire within the antenna connector on the RF module, slightly U-shaped and nearly touching the inside surface of the connector. A slight upward change in temperature caused the wire to lengthen and make a poor contact with the inside surface of the connector, producing an unwented shunt resistance to ground.

A second malfunction was found at this time--a loose ground lug in the diode circuits. This was difficult to find because the actual riometer wiring did not correspond to the circuit diagram.

Since the riometer has been fixed and re-tuned it has performed regularly, but the 5845 diodes continue to have a shorter life than the 5722 diodes used in the ARI riometers.

Time losses were marked on the charts until the recorder was finally set correctly in December.

1964	29 June	Bandwidth 15 kc, integration 2 sec, frequency sweep off, minimum detector off, zero antenna attenuation, antenna polarization N59E true.
	2 July	0500 to 1130. Equipment failure, reason unknown. Quiet-day curve shifts downward slightly.
	7 July	Quiet-day curve shifts back up.
	23 July, 2020 to 31 July, 2235	Downward excursions caused by micro- phonic noise diode.
	26 Aug, 1314 to 1 Sept, 1525	No record, servo diode burnt out.


	6	Sept	0254 to 1257. Equipmental drop in record, cause unknown.
	22	Sept	1627 to 2634. Equipmental drop in record, cause unknown.
	29	Sept	1627 to 2245. Recorder ran out of paper. Changed noise diode in attempt to cure drifting quiet-day curve.
	10	Oct	Pen running out of ink.
	12	Oct	2040. Pen inked.
	27	Oct	0542 to 2112. Record rises, equipmental problem or local man-made noise.
		Oct, 1109 to	Servo diode burnt out.
	2	Nov, 2230	
	8	Nov	0203 to 1210. Equipmental drop in record.
	16	Nov	2300. Changed serve diede.
	23	Nov	2300. Installed new servo unit. Curve drops.
	28	Nev	0508 to 0517. Equipmental drop in record.
	30	Nov	1130. Changed back to original servo unit.
	7	Dec	0913 to 0920. Equipmental drop in record.
1965	3	Jan	Last record in this volume.
2. 18-	Mc Rion	meter (ARI)	
1964	29	June	Bandwidth 30 kc, integration time & sec, frequency sweep off, minimum detector off, antenna attenuation 13 db, antenna polarization S147E true.
	31	Aug, 0210 to	Servo diode burnt out.
	1	Sept, 0600	
		Sept, 0830 to	Generator overhaul, equipment not operating.
		Oct, 2115	
	5	Oct	man-made noise half of each day.
	11	Oct	


31	Oct, 1955 to	Recorder stopped.
12	Oct, 2100	Changed frequency slightly.
17	Oct	0300 to 0825. Subtle local noise raises record level.
24	Oct	0300 to 0605. Subtle local noise raises record level.
25	Oct	0000 to 0650. Subtle local noise raises record level.
1	Nov	0130 to 1215. Batteries limiting riometer.
1	Nov	1115. Batteries die.
2	NGV	2230. Start again.
16	Nov to	Chart is 10 minutes/day fast.
23	Nov	
	Nov	Chart is 7 minutes/day fast.
30	Nov	
	Nov	Chart is 4 minutes/day fast,
	Dec	
·	Dec	Chart is 1 1/2 minutes/day fast.
	Dec	
28	Dec	0730. Batteries die.
28	Dec	2230. Begin again.
3	Jan	Last record in this volume.


B. Chart Records


1965


The chart records appearing on the following pages are reproduced at 20 percent of their original size. Time goes from right to left, the records begin and end at midnight GMT. The records are in chronological order by frequency; the 30-Mc records are presented first.

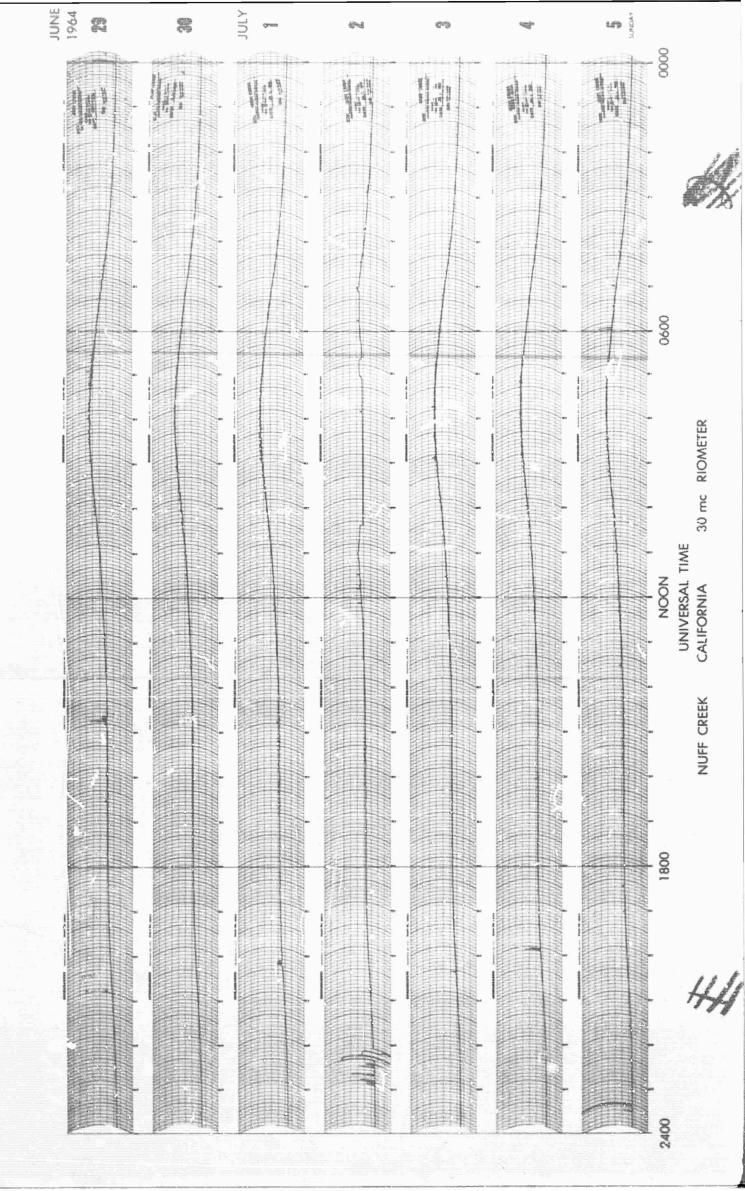


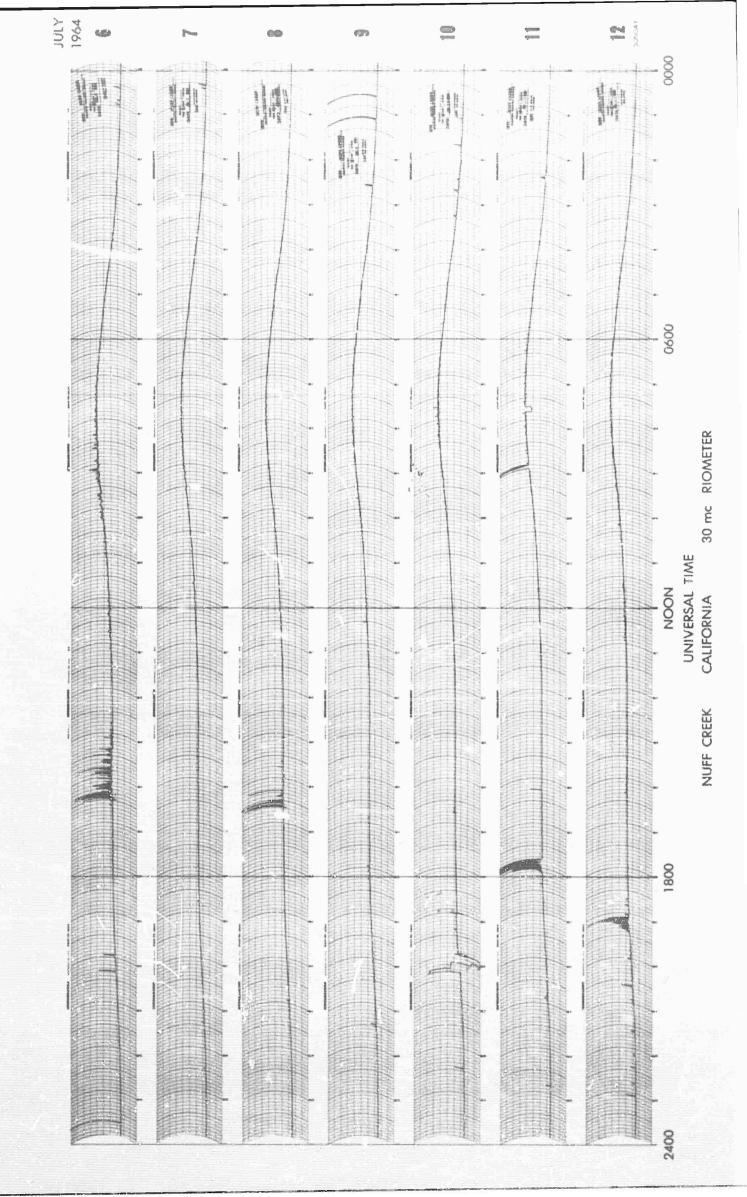


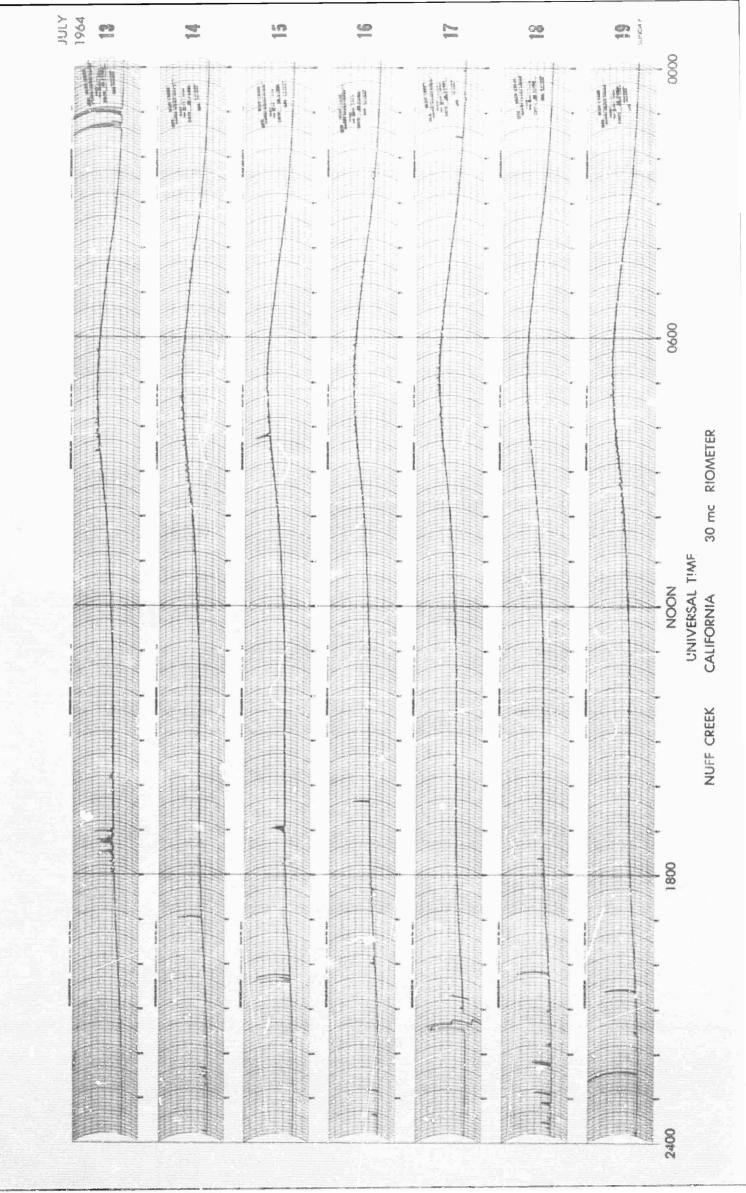


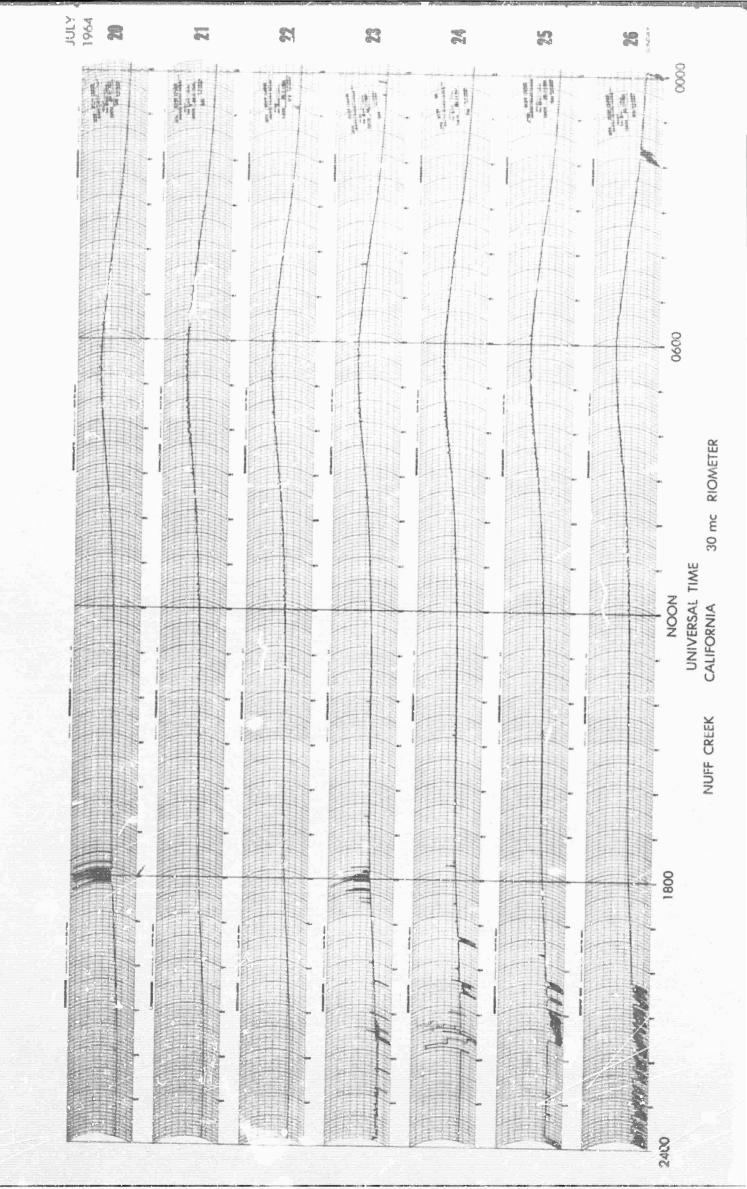


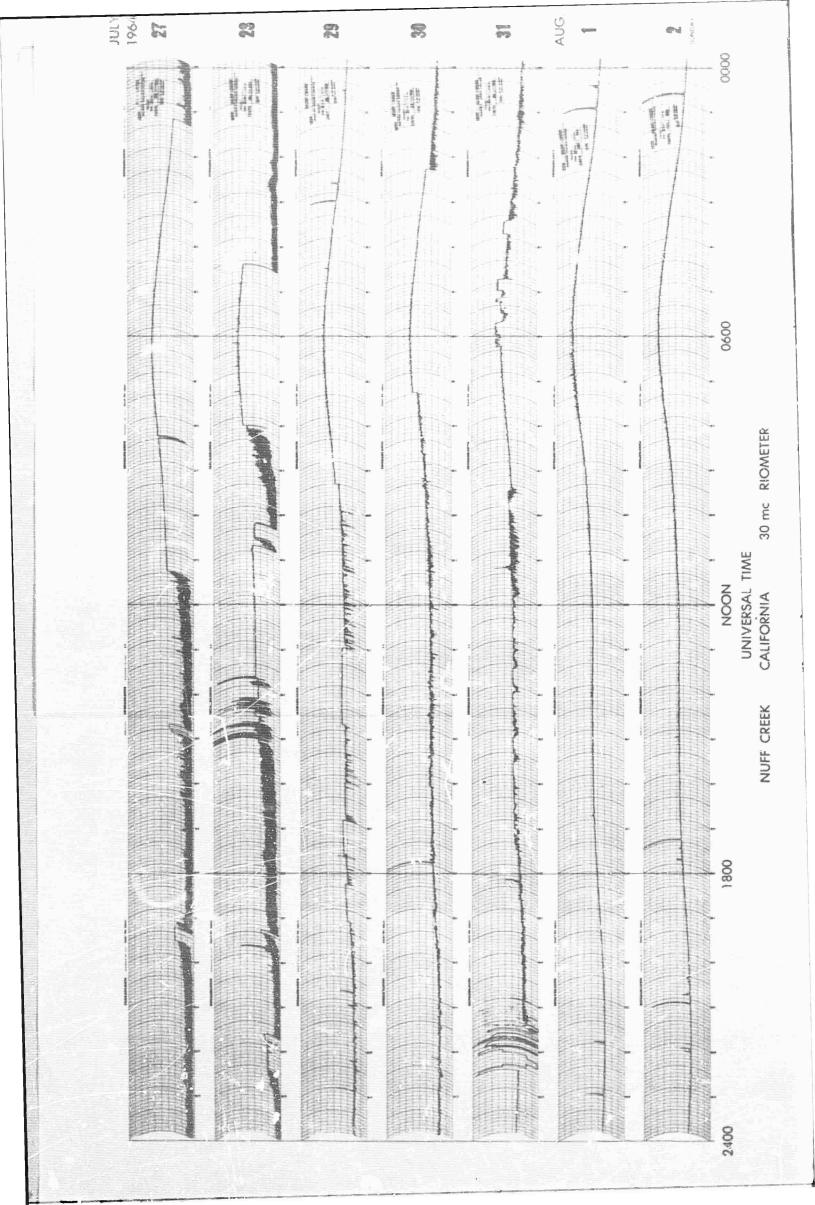


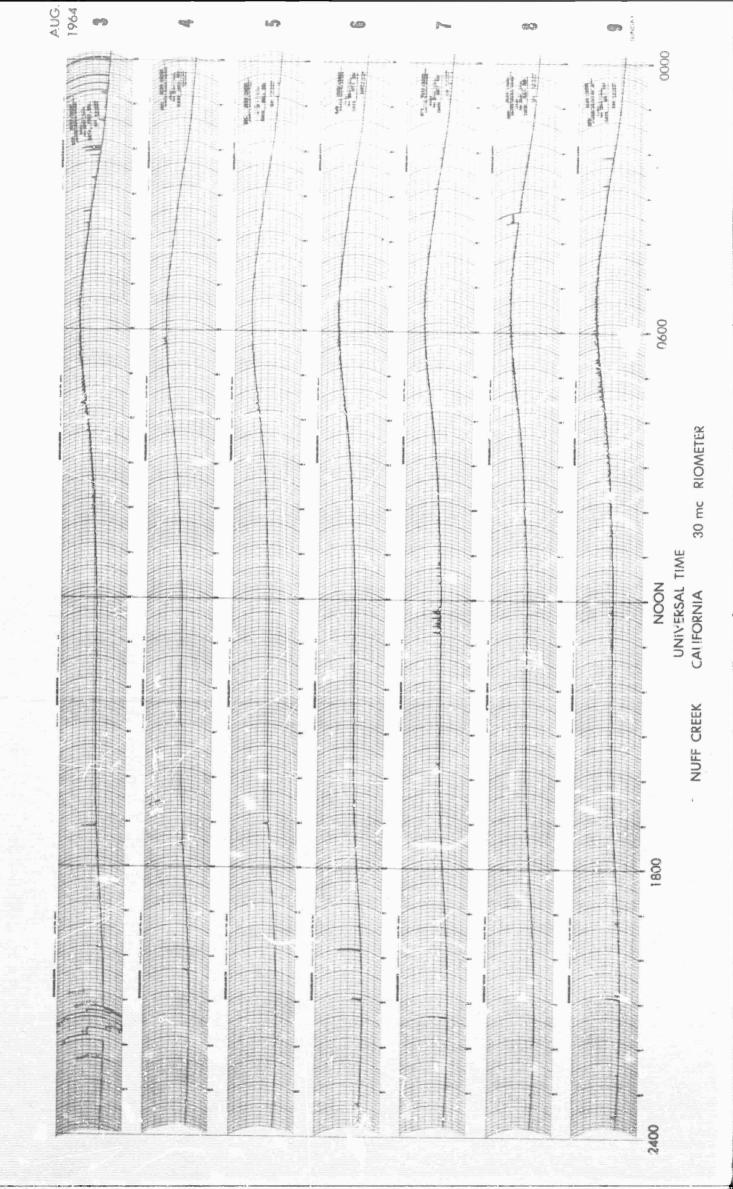


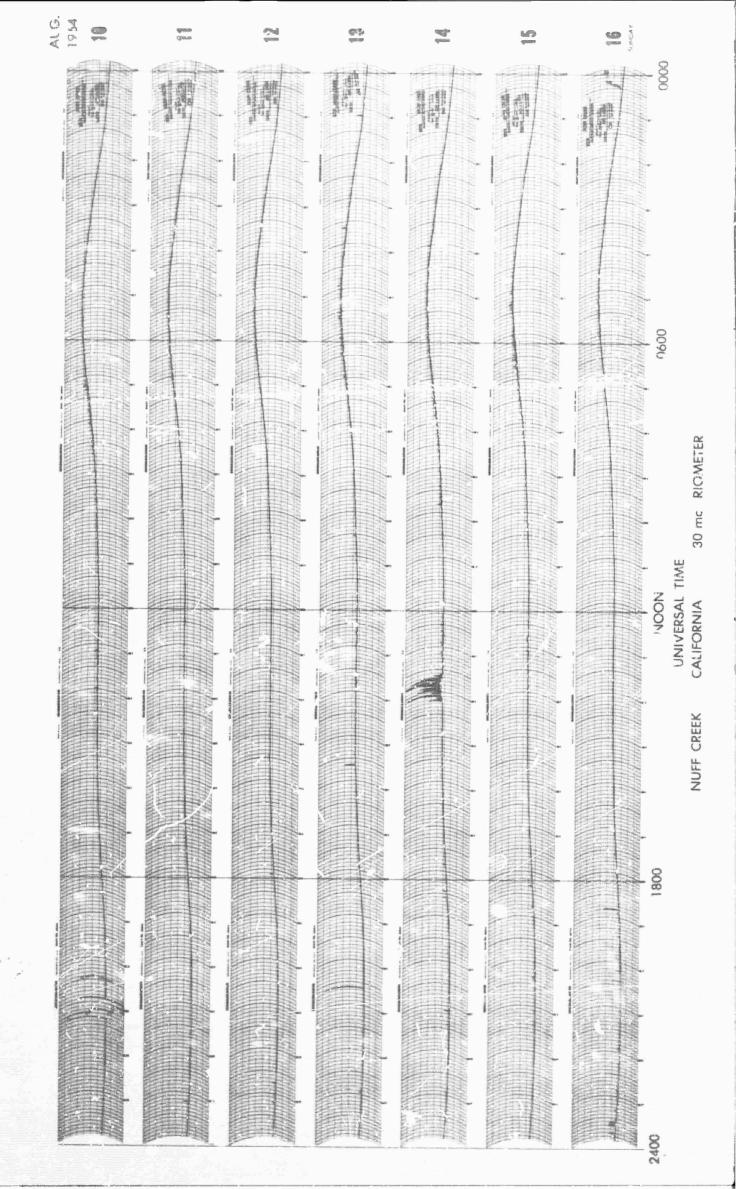


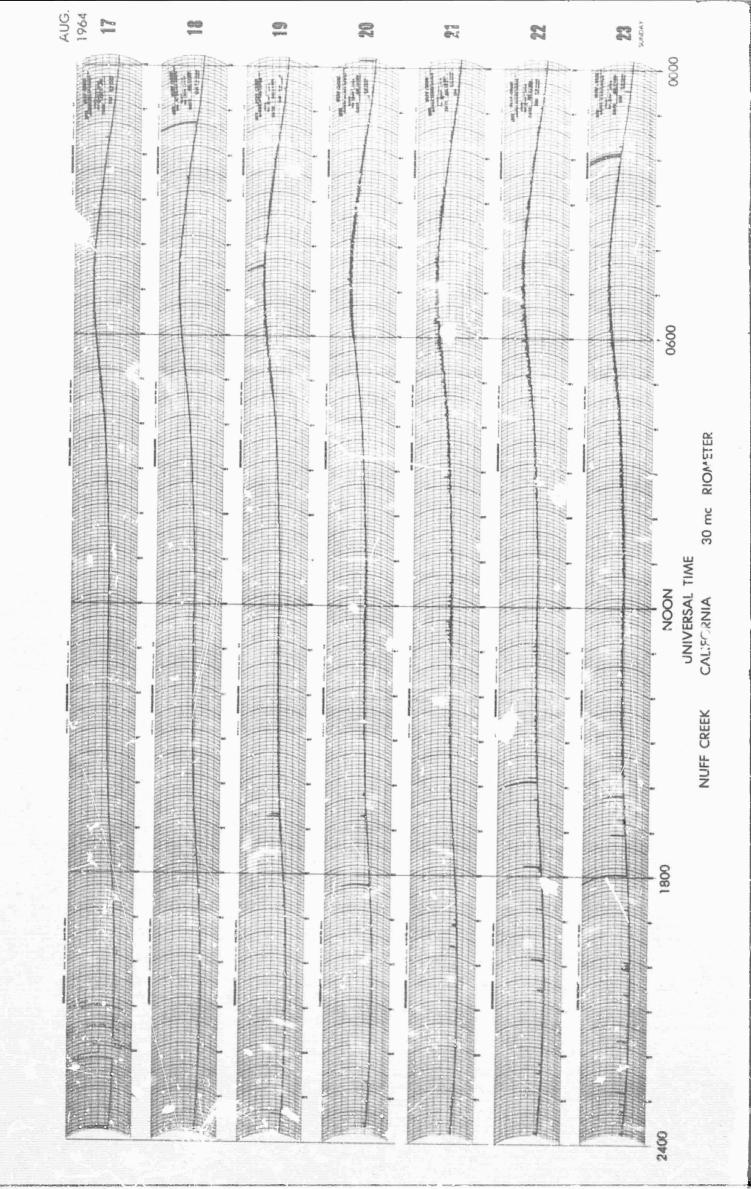


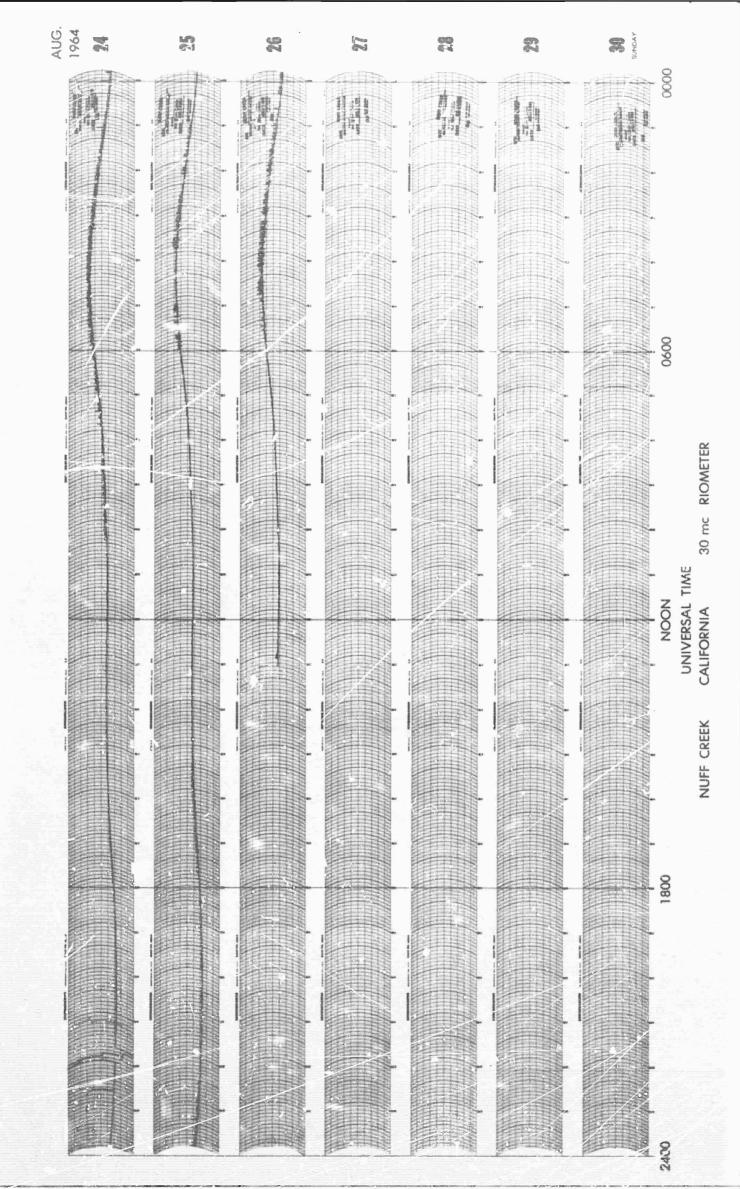


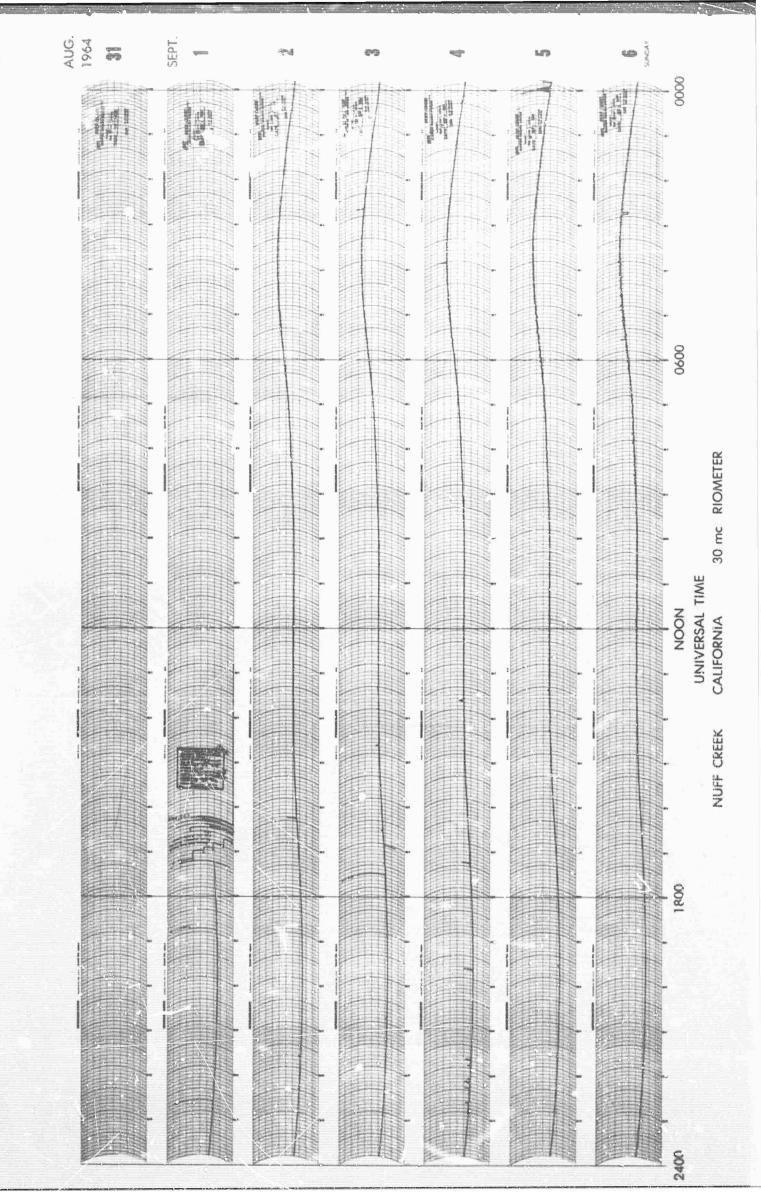


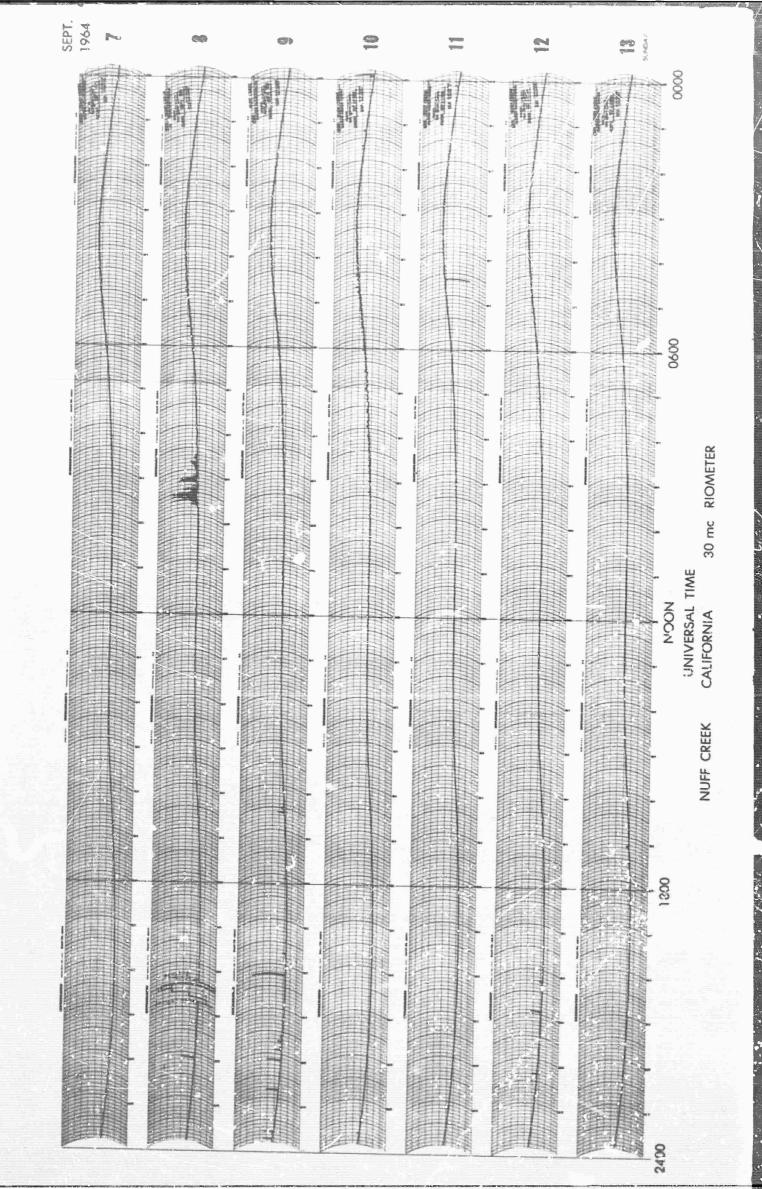


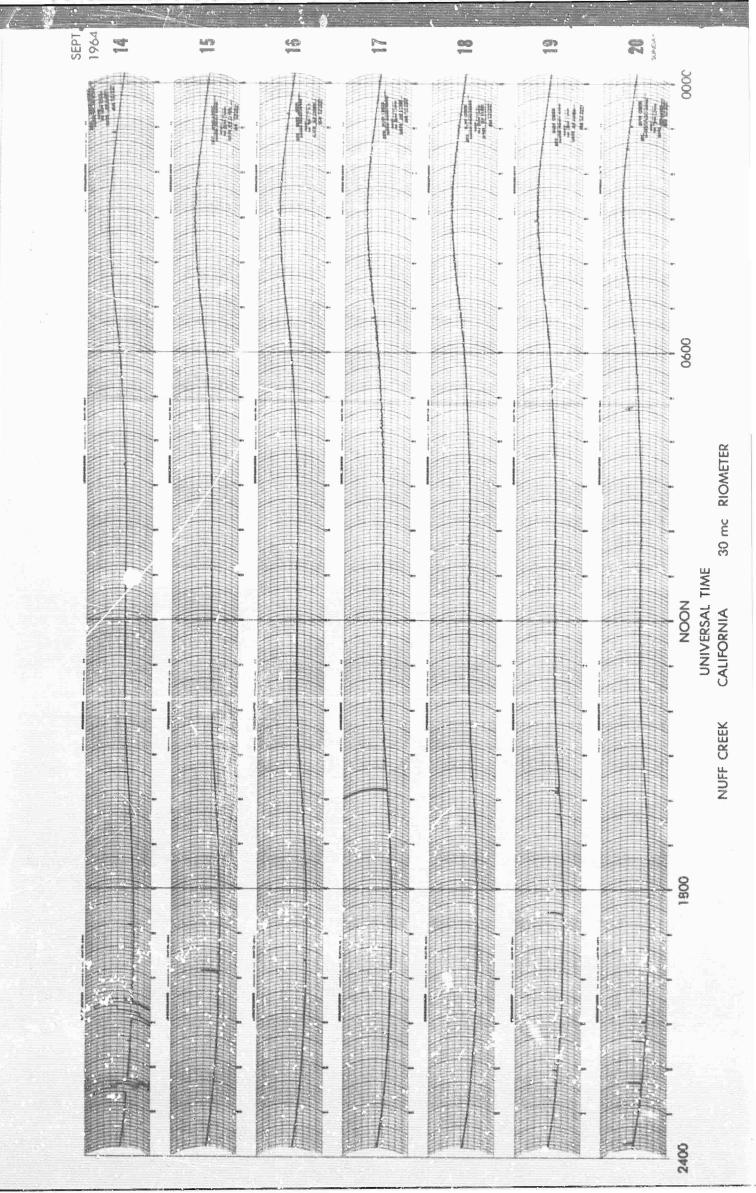


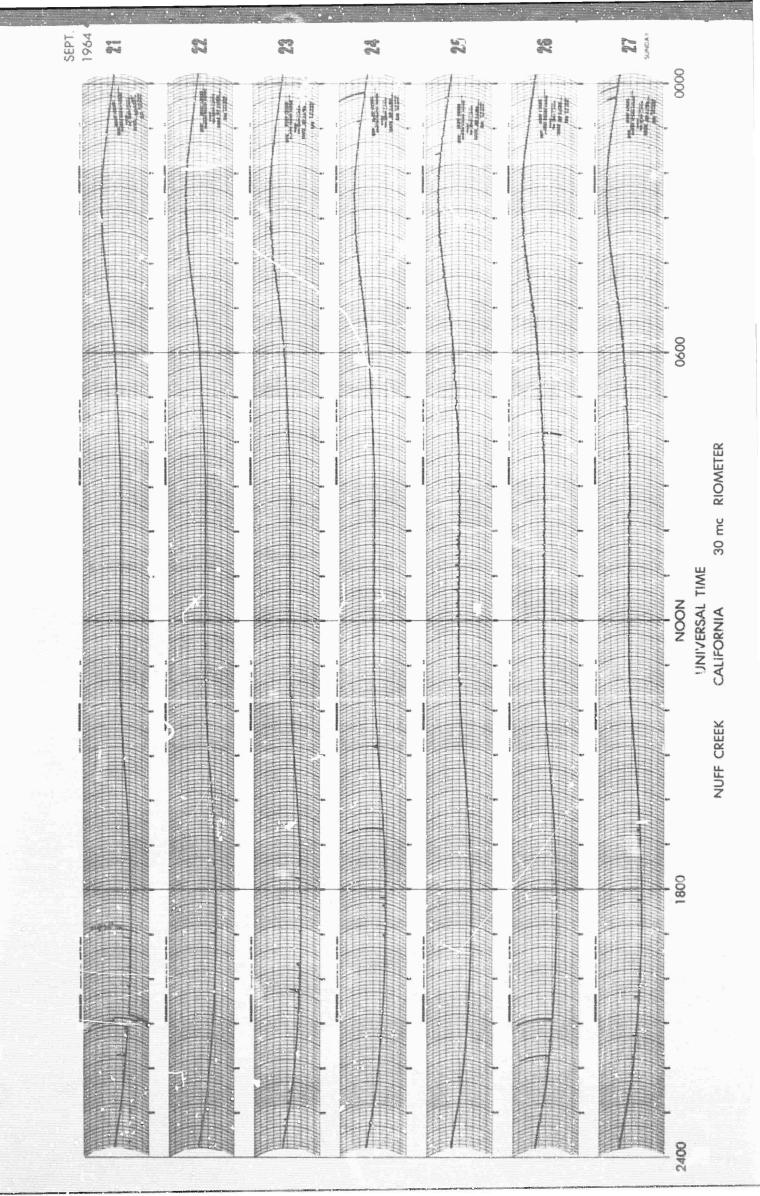


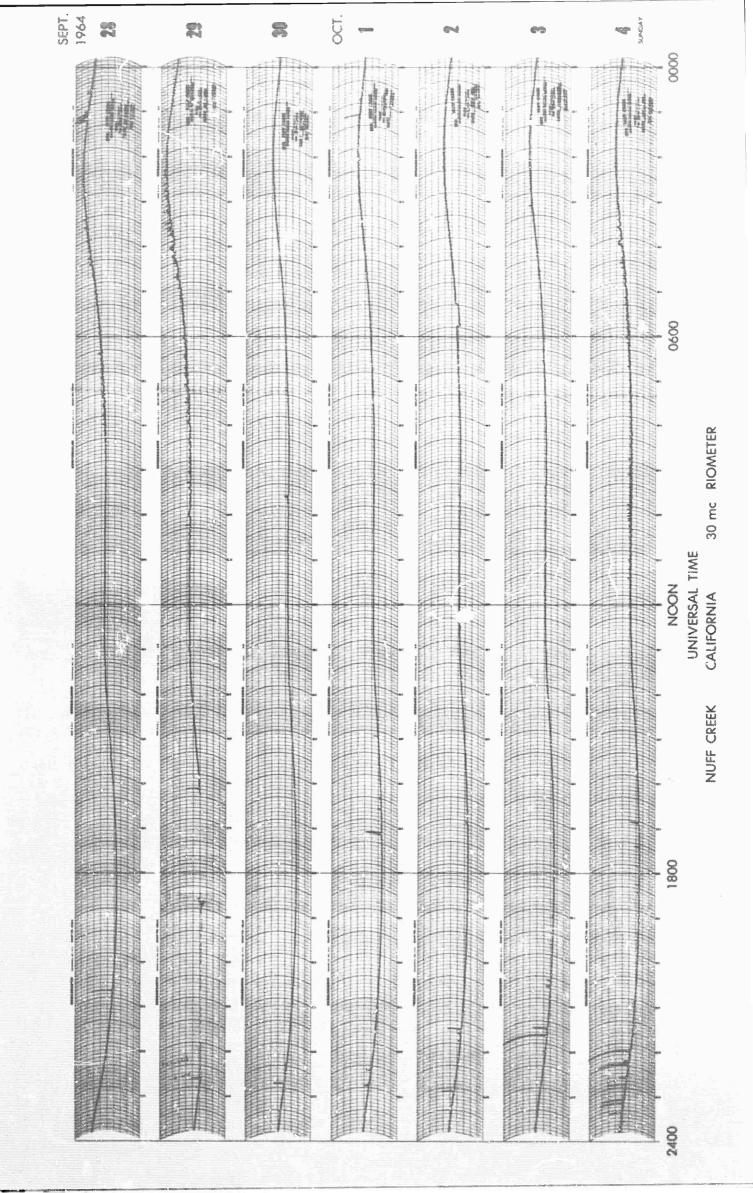


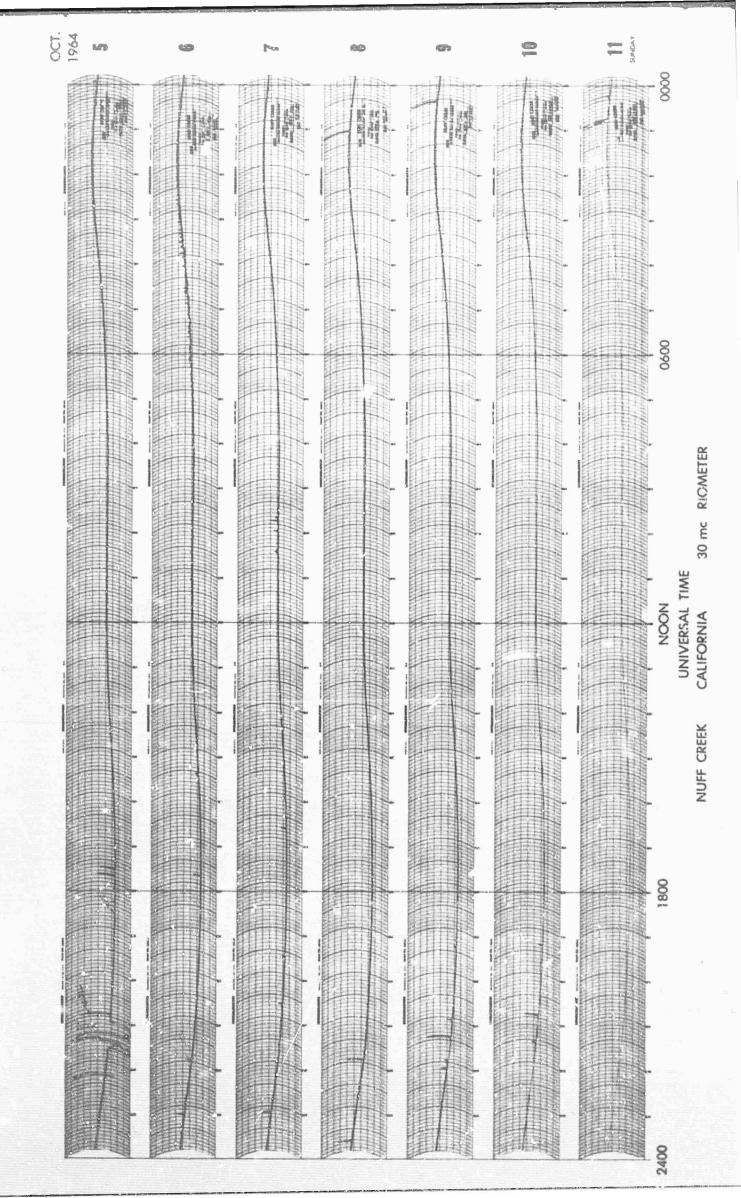


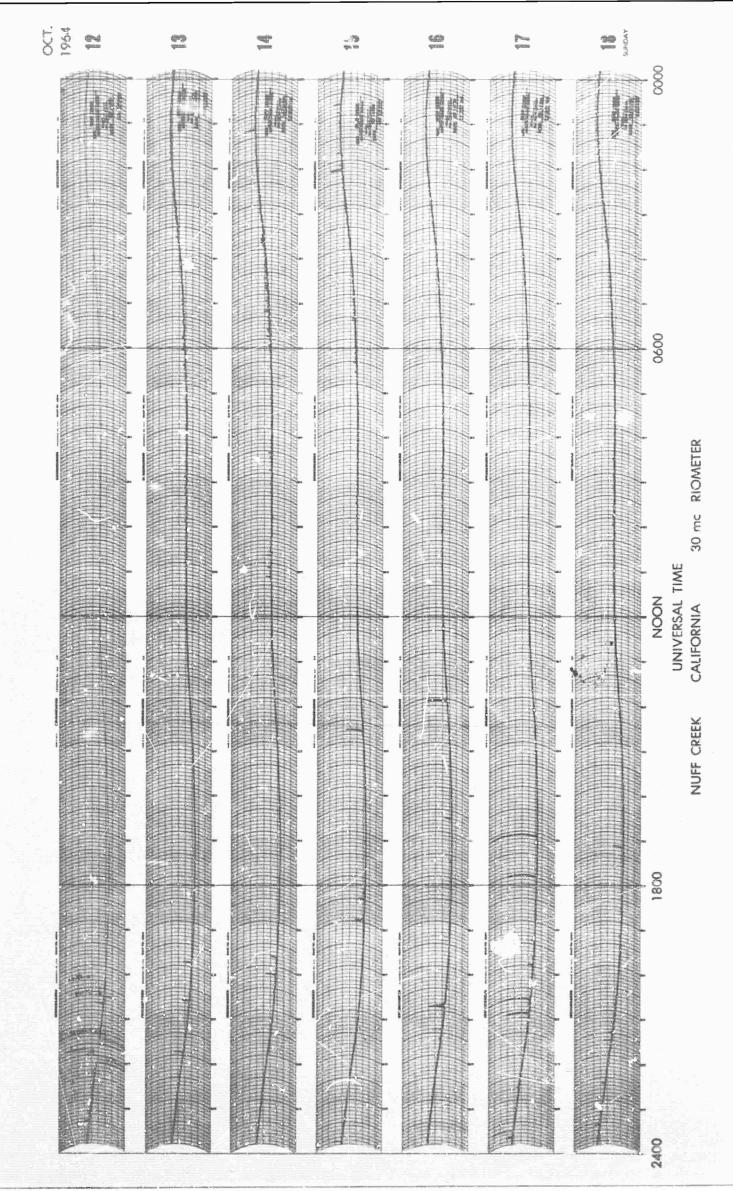


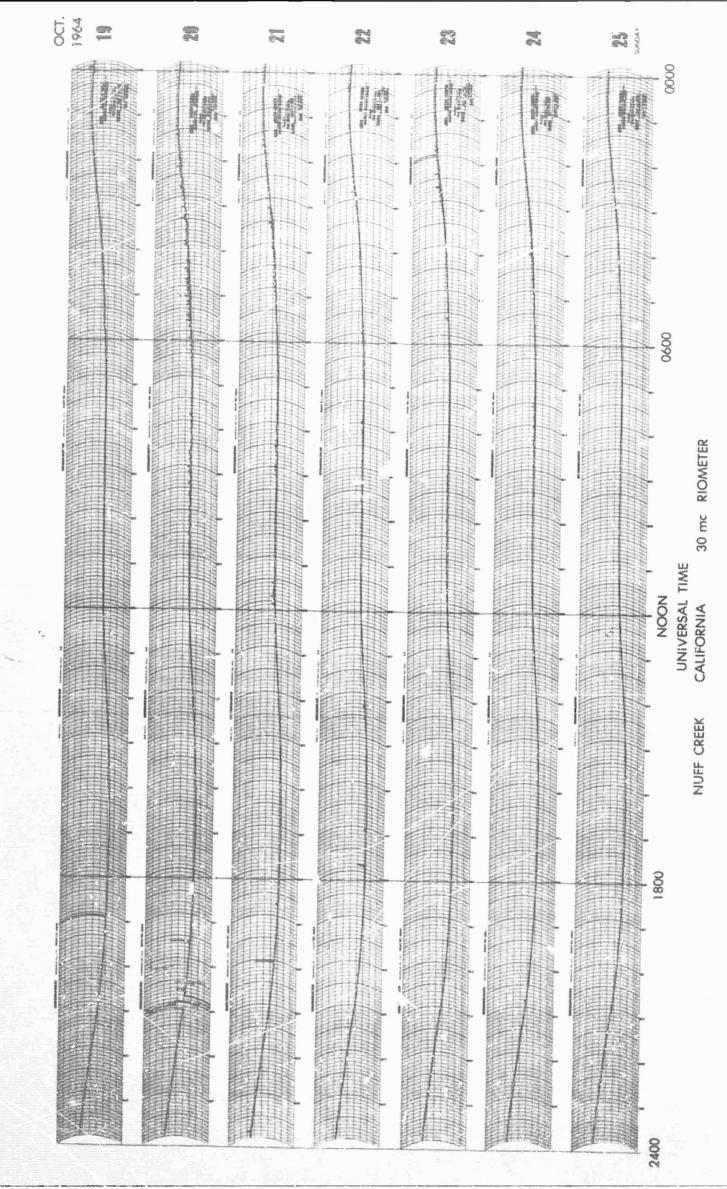


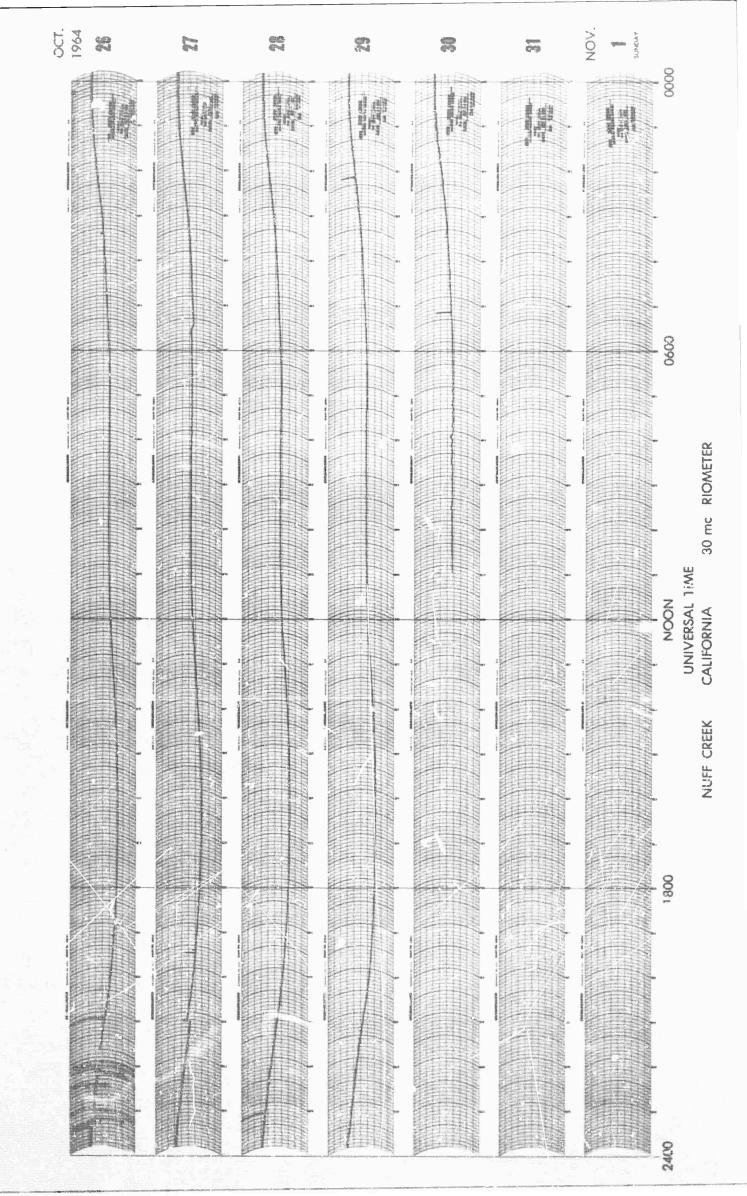


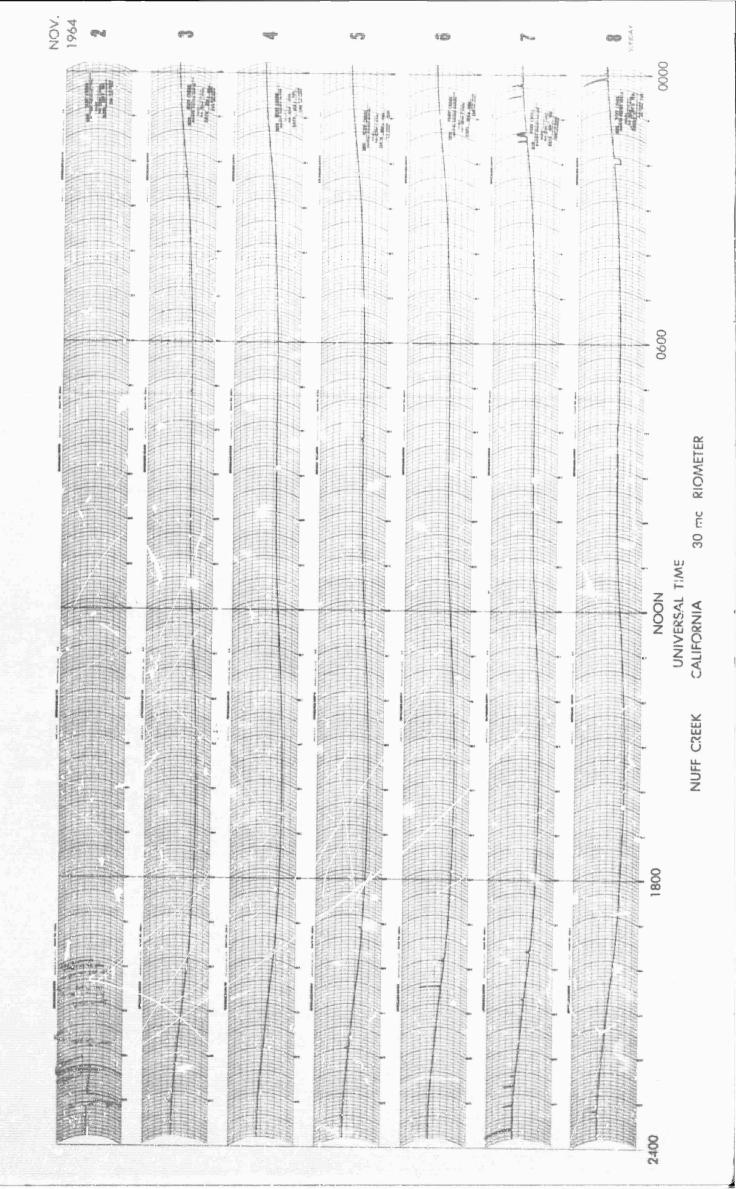

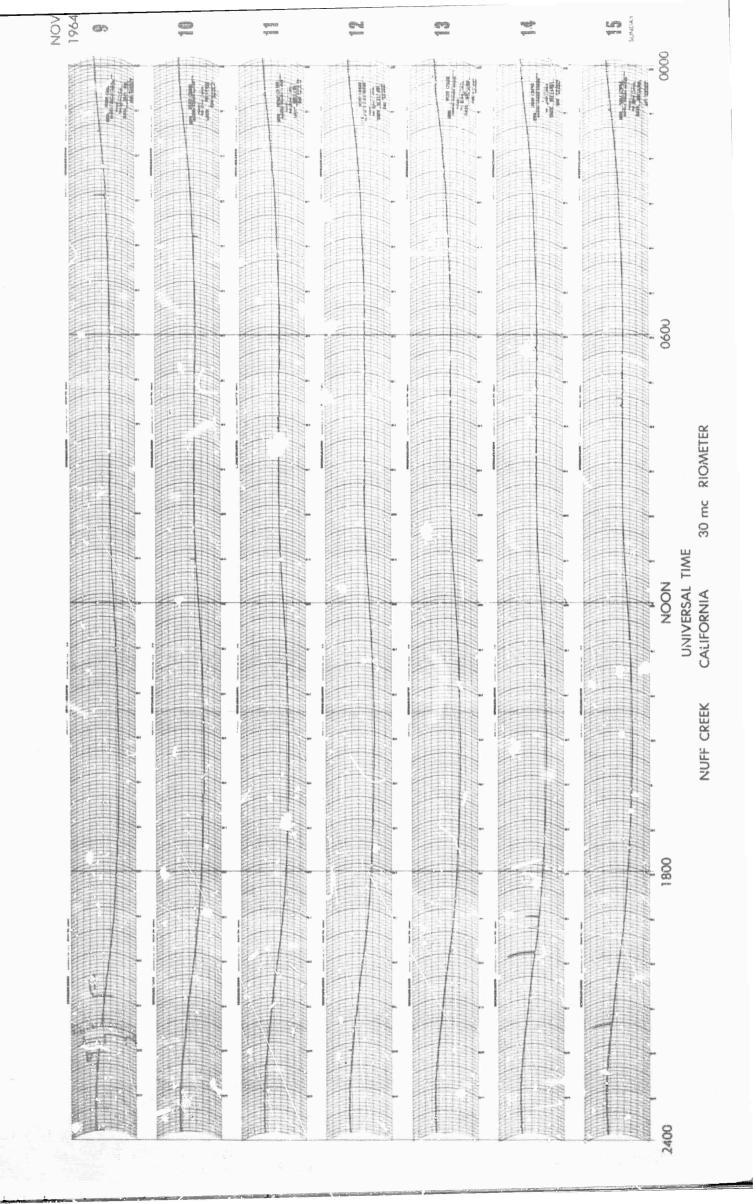

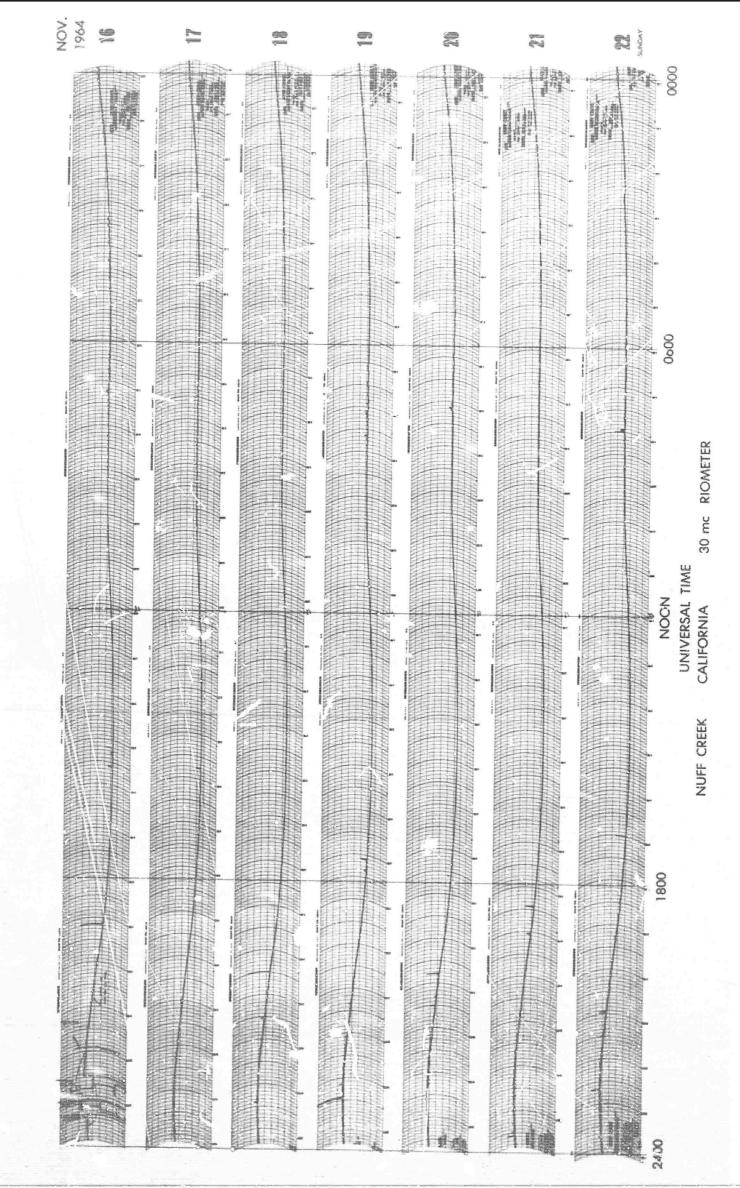


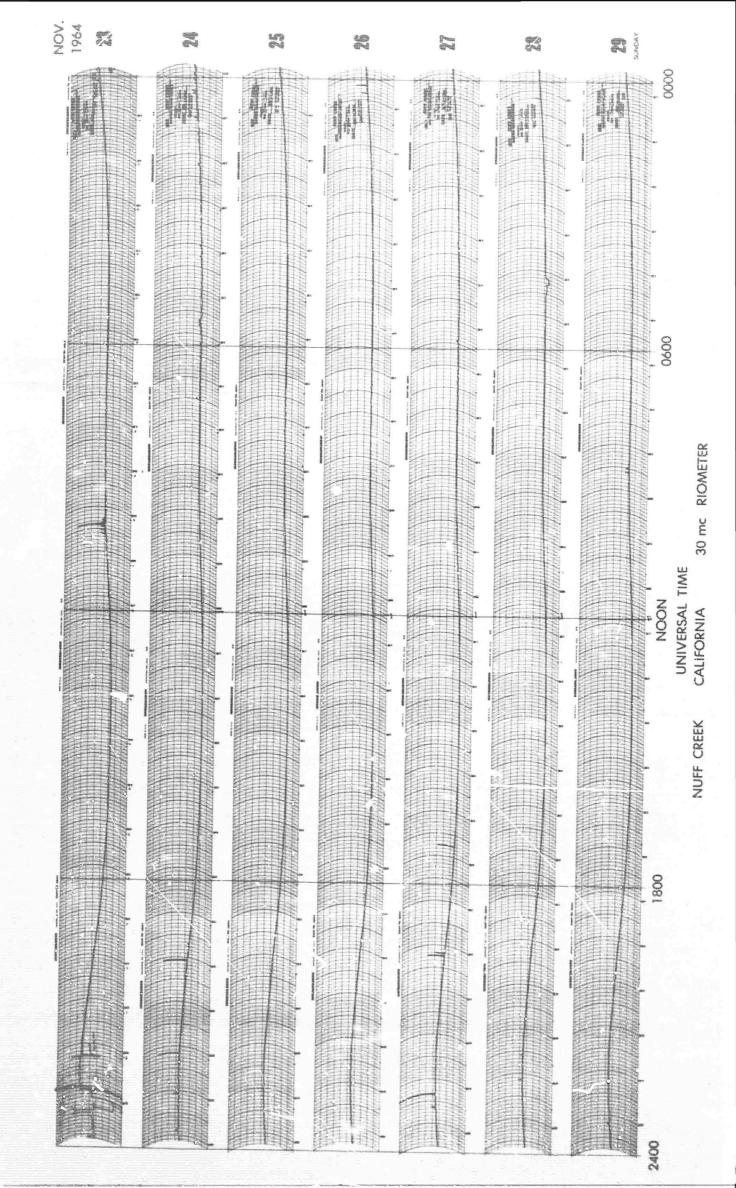


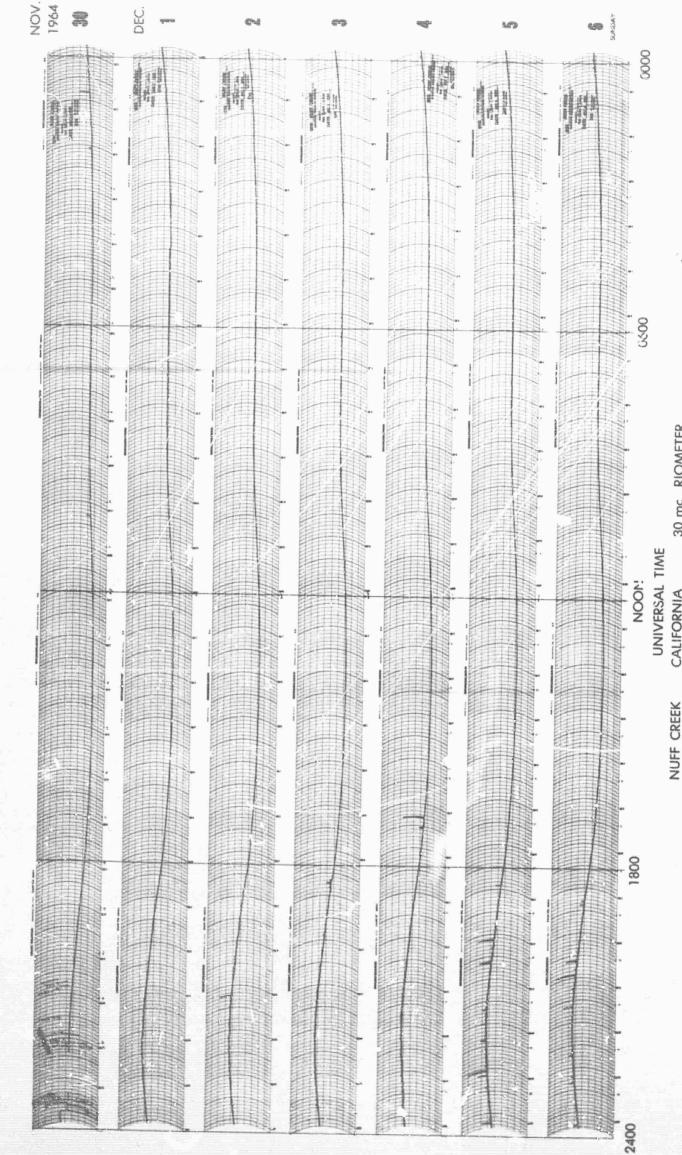



CALIFORNIA


30 mc RIOMETER

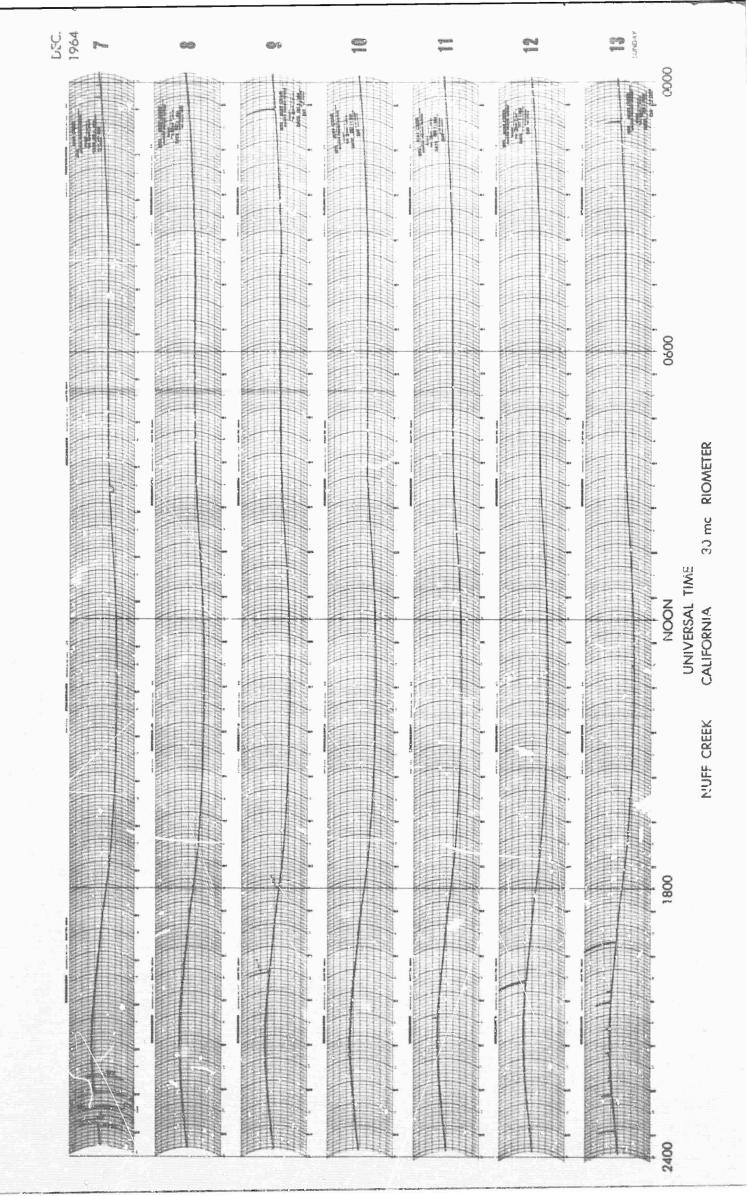


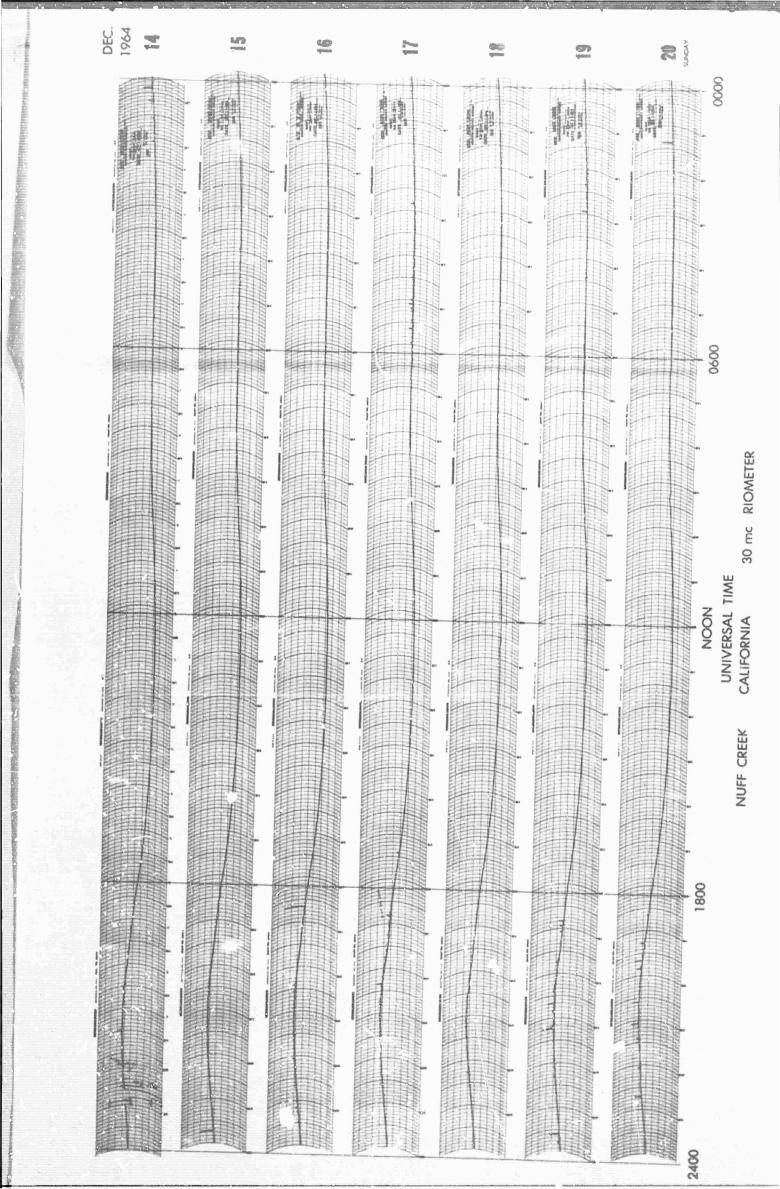


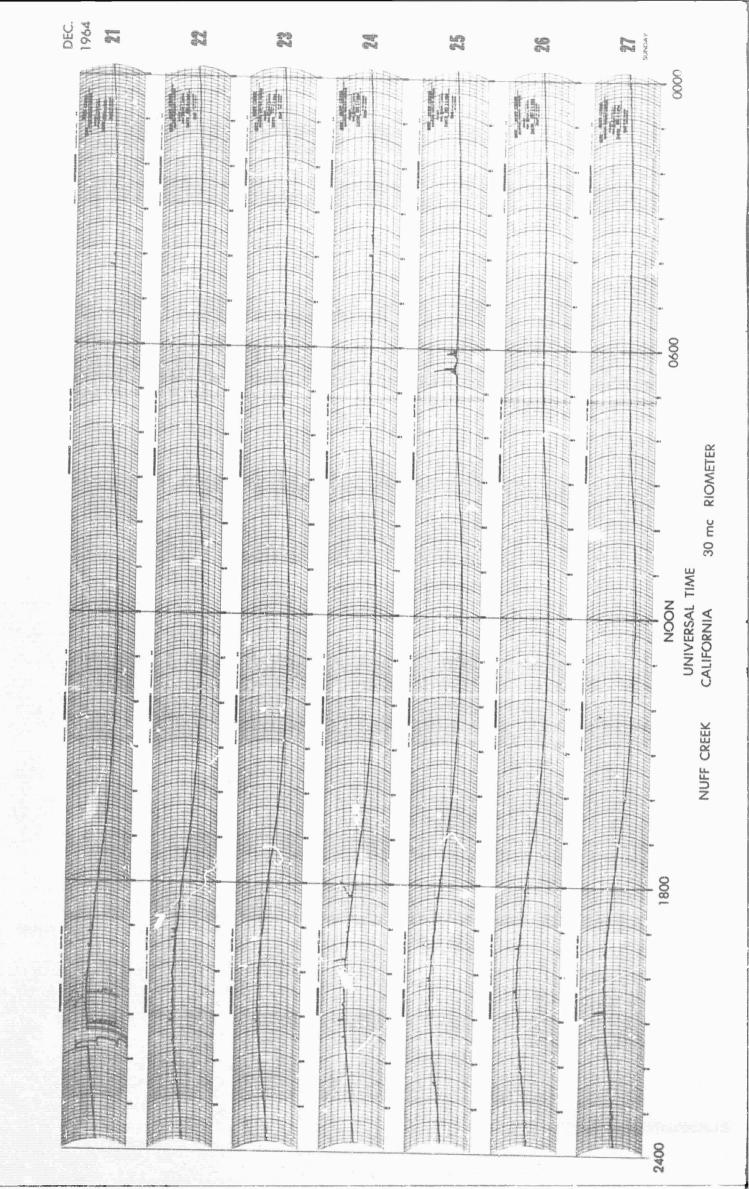


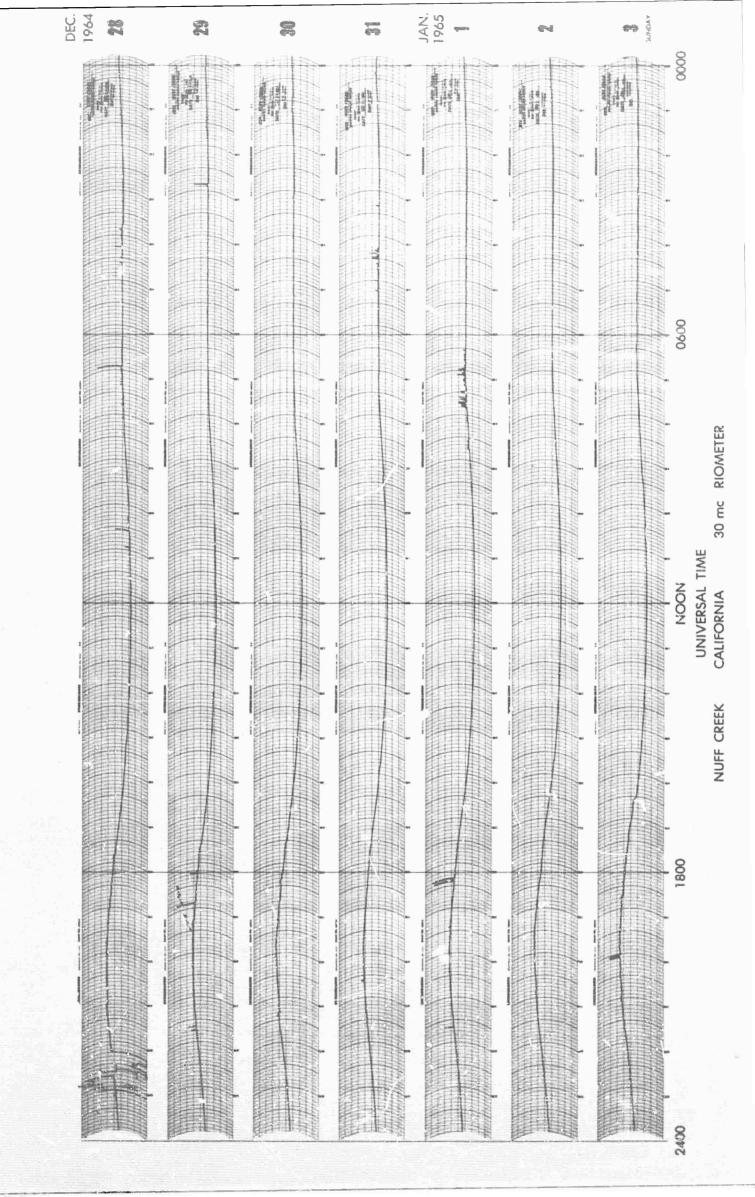


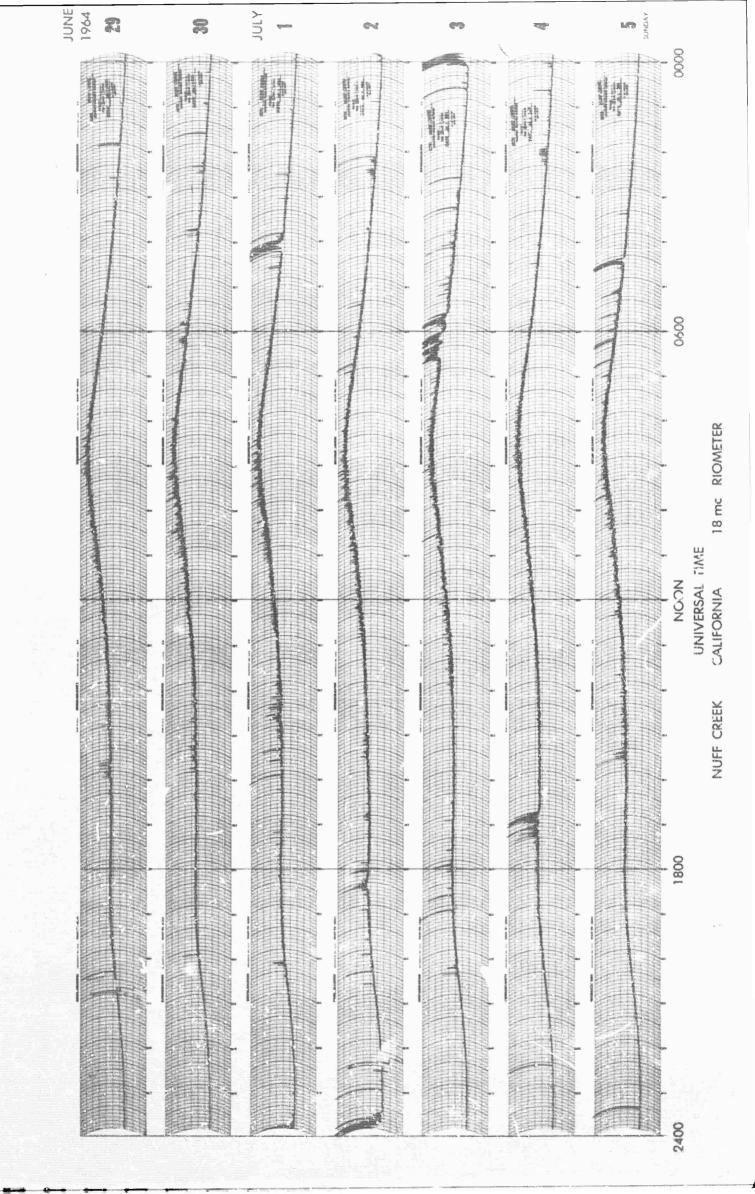


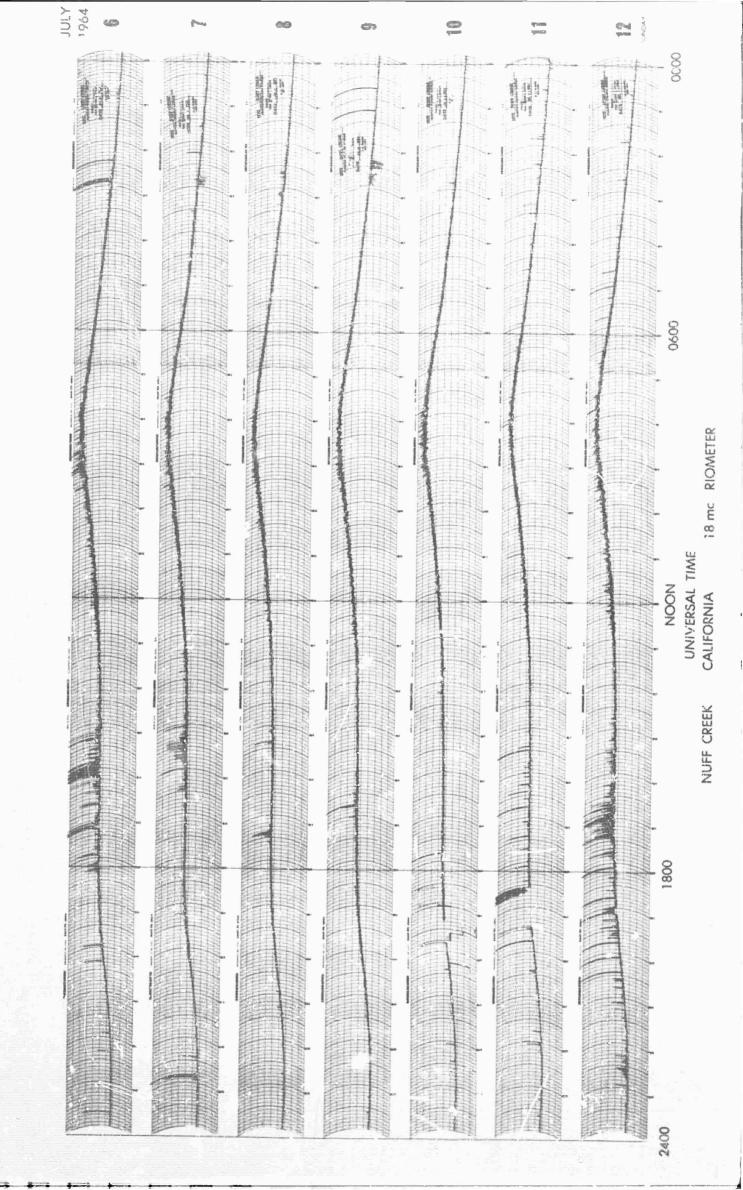


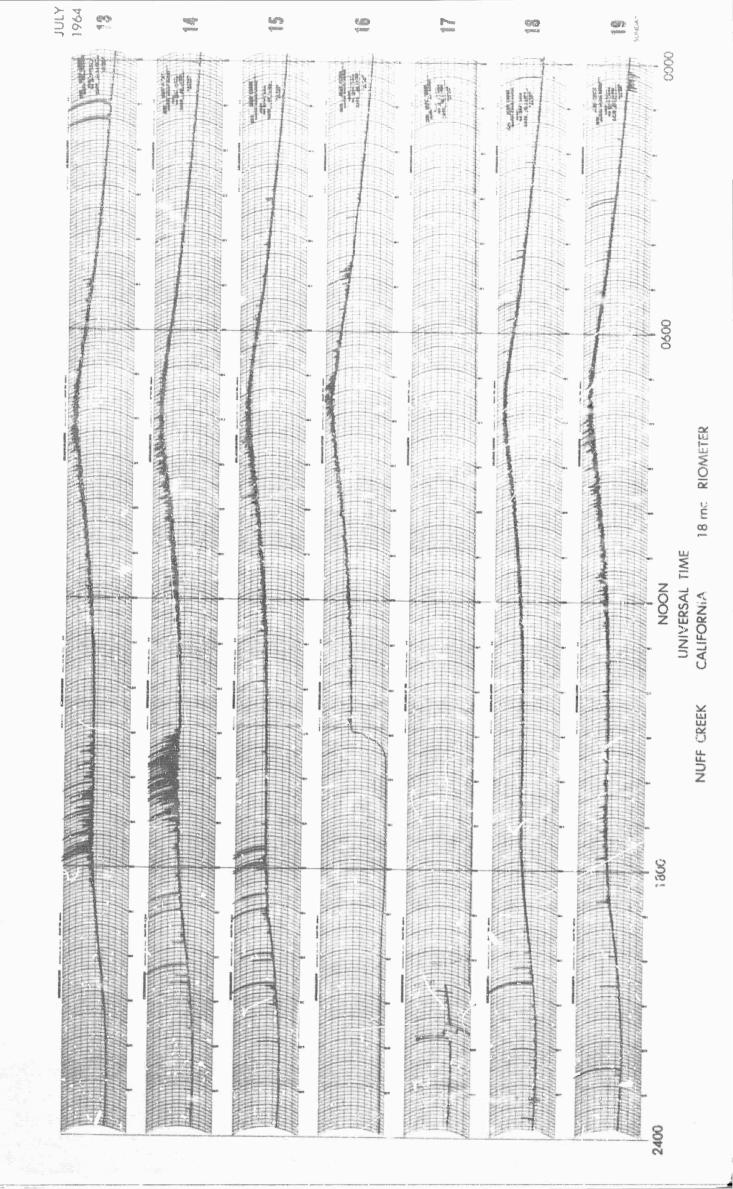


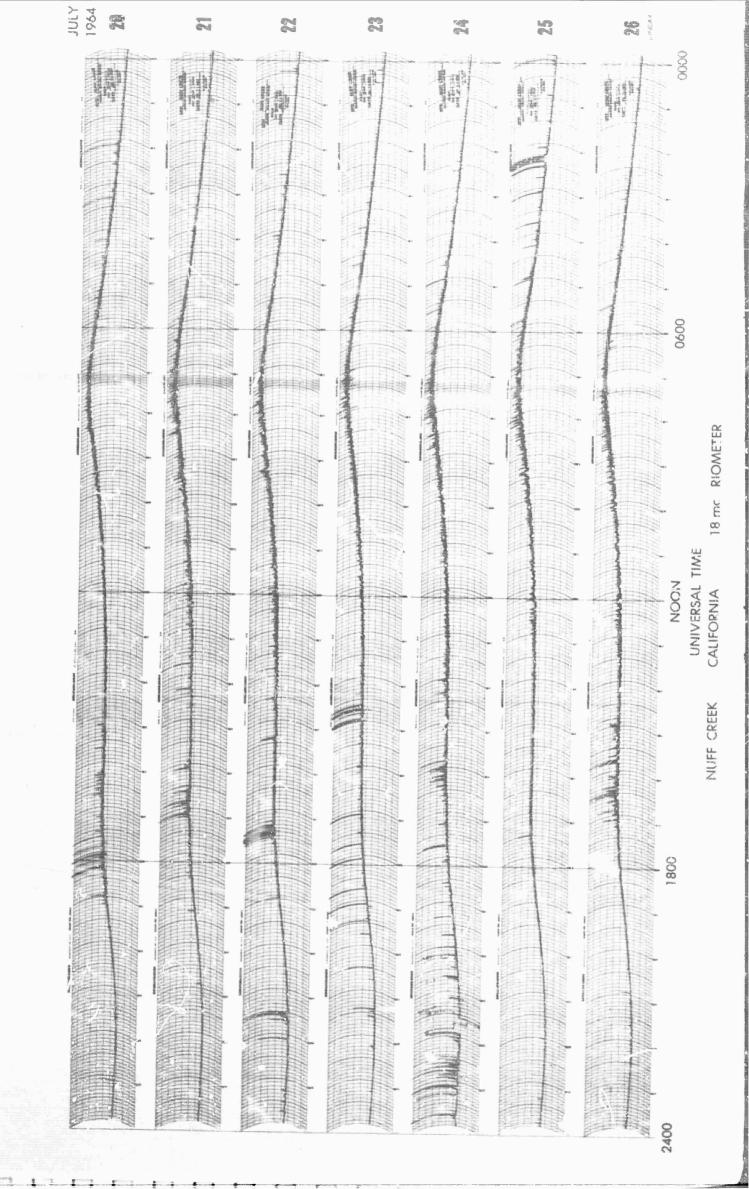


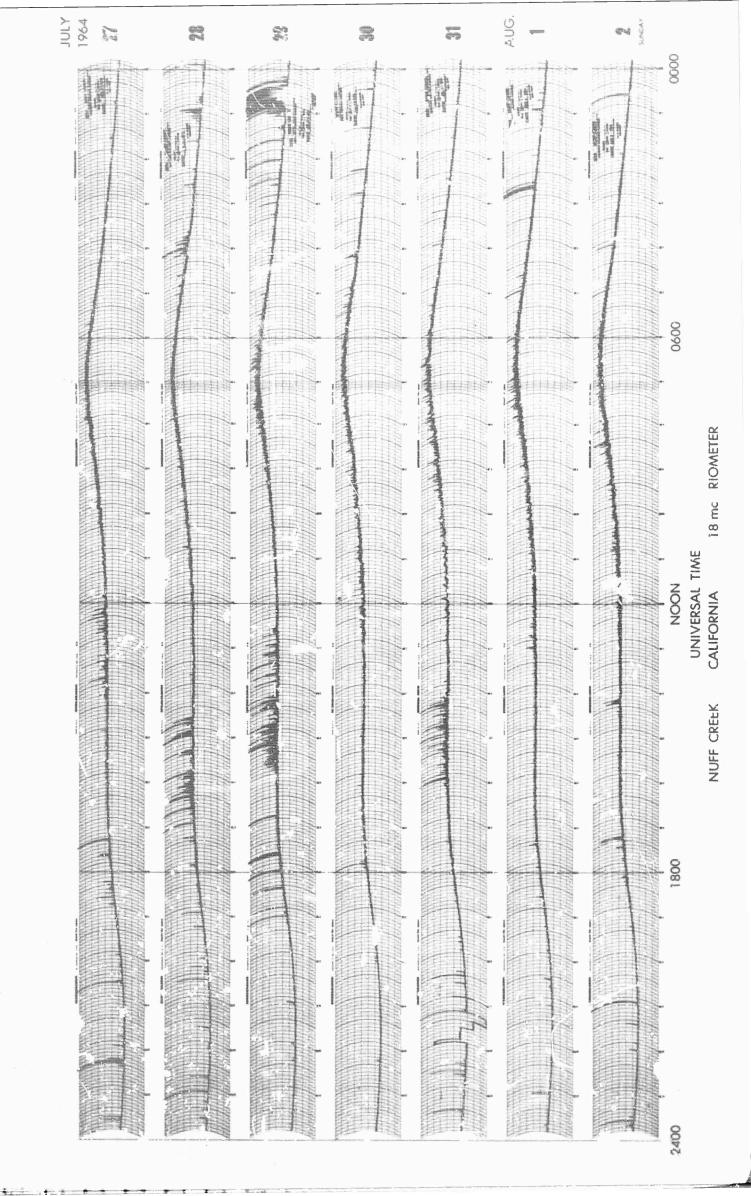


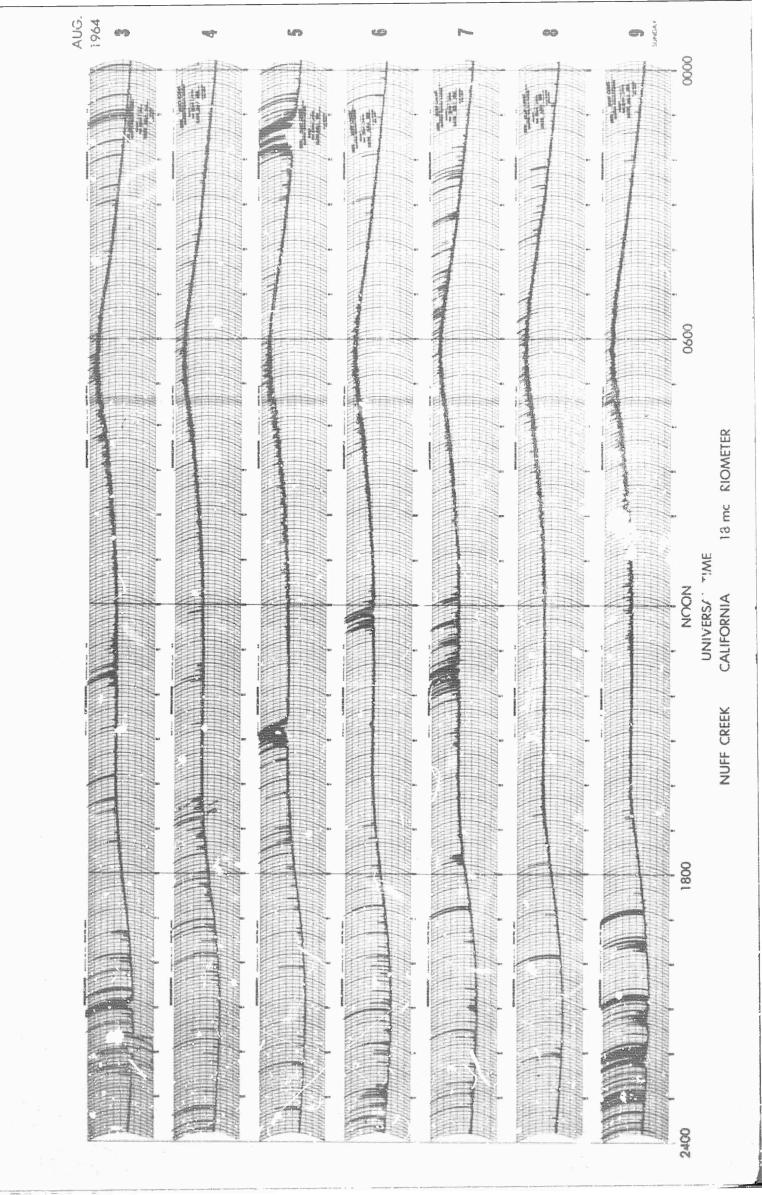


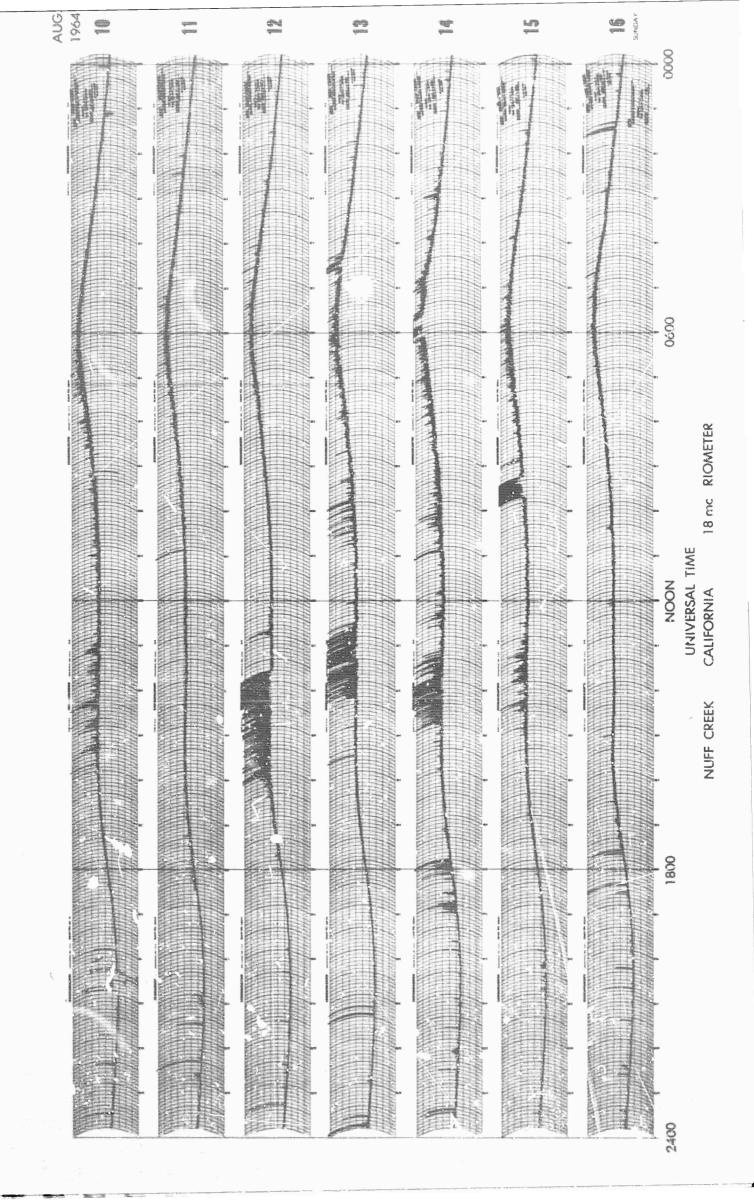


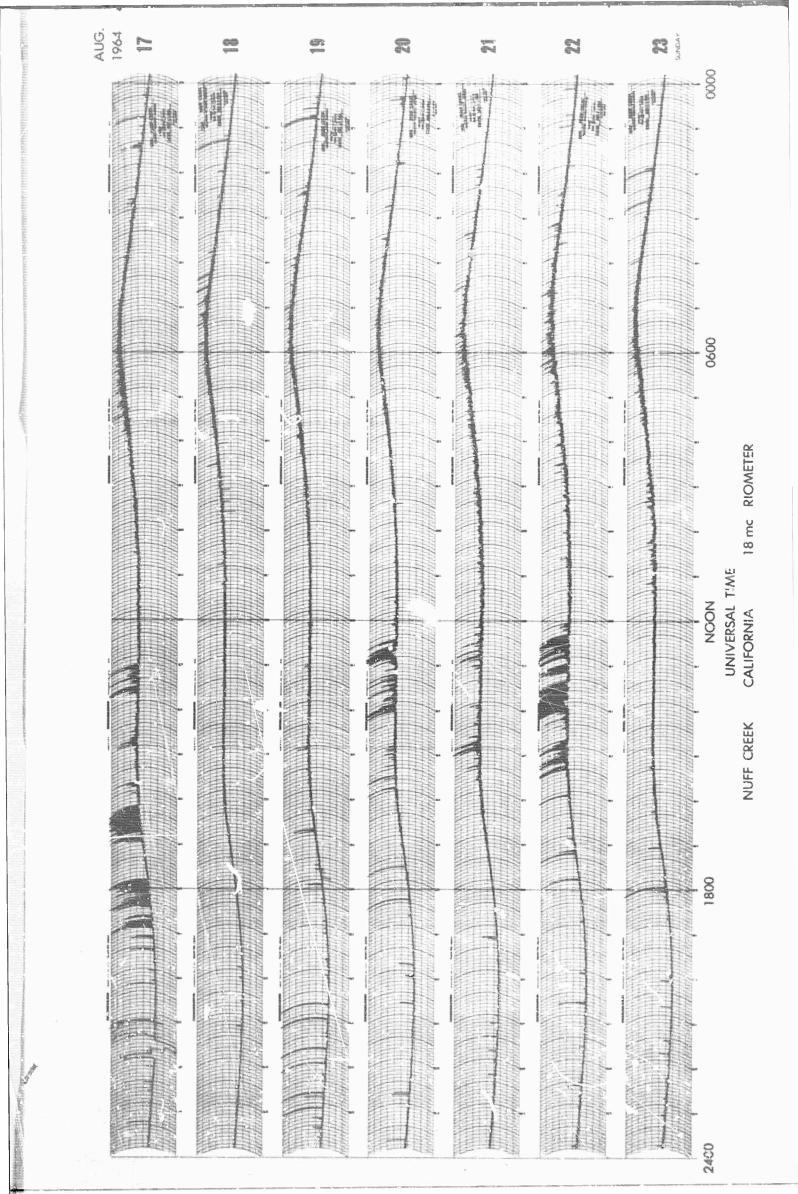


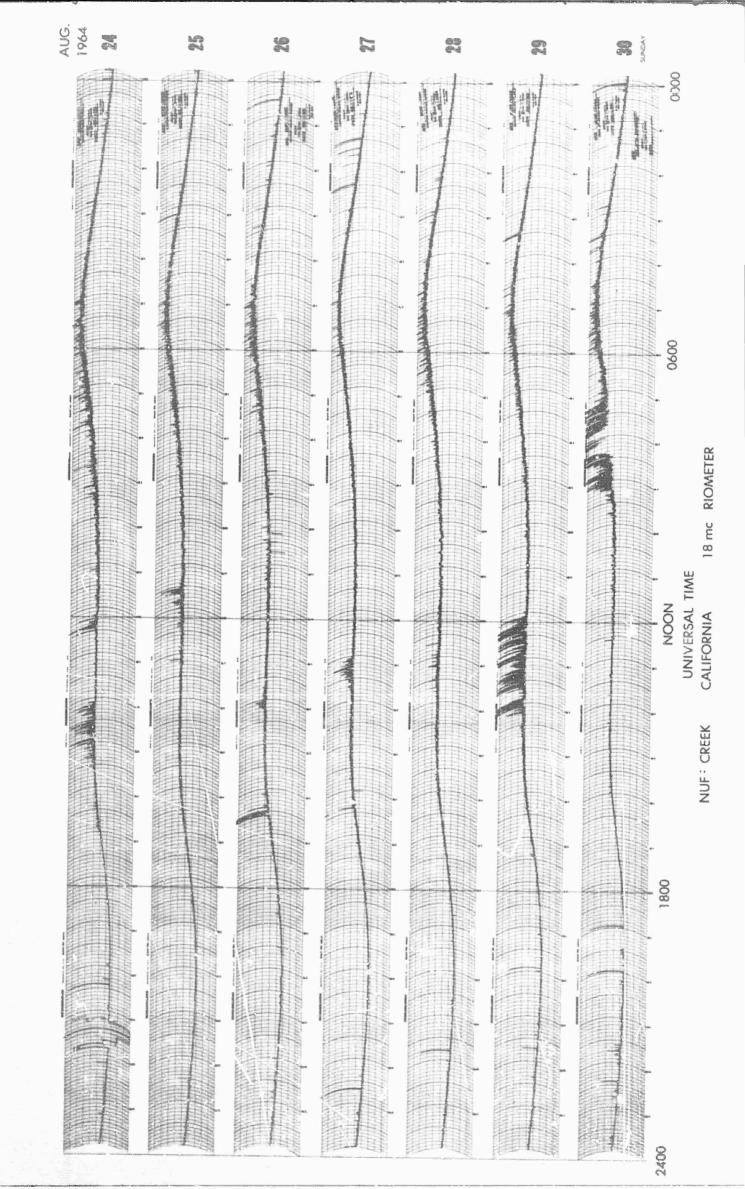


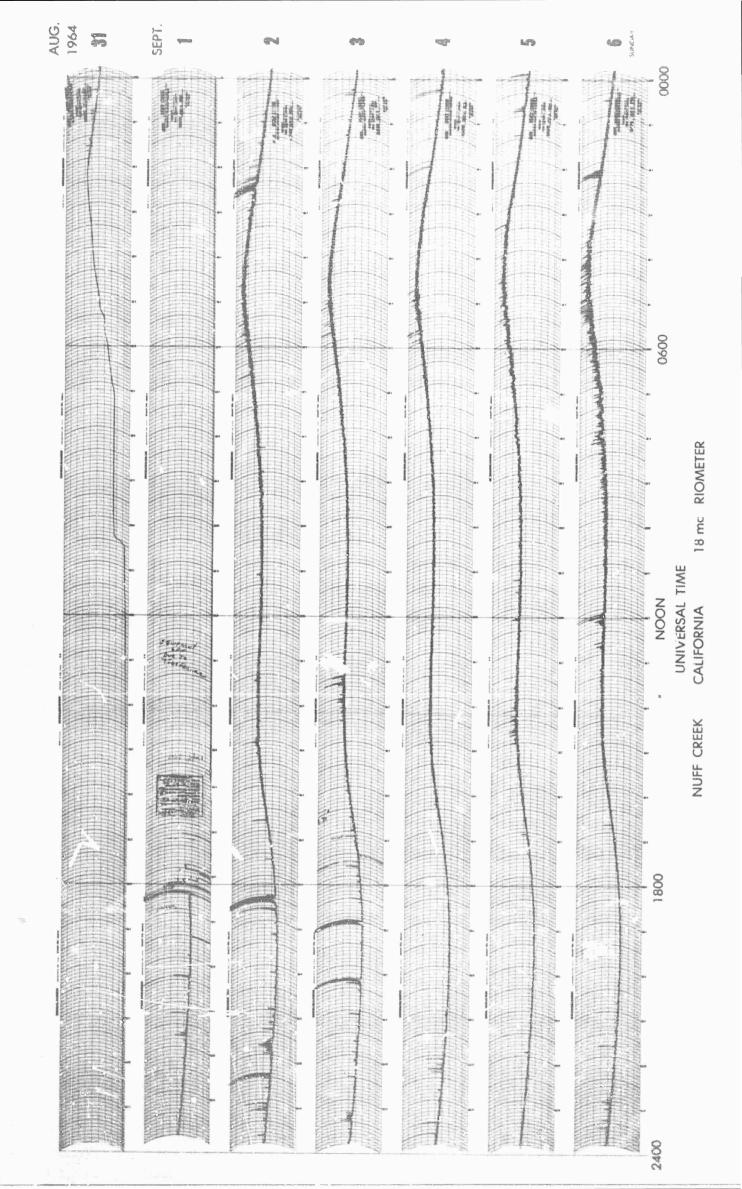


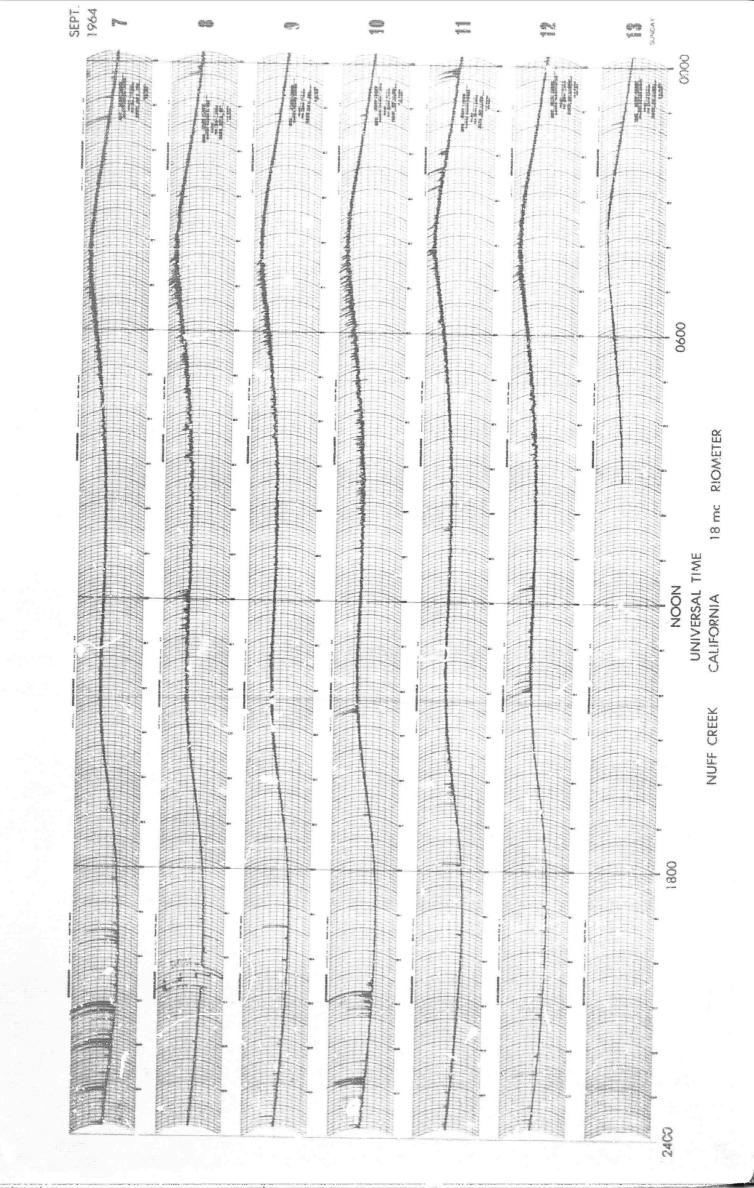


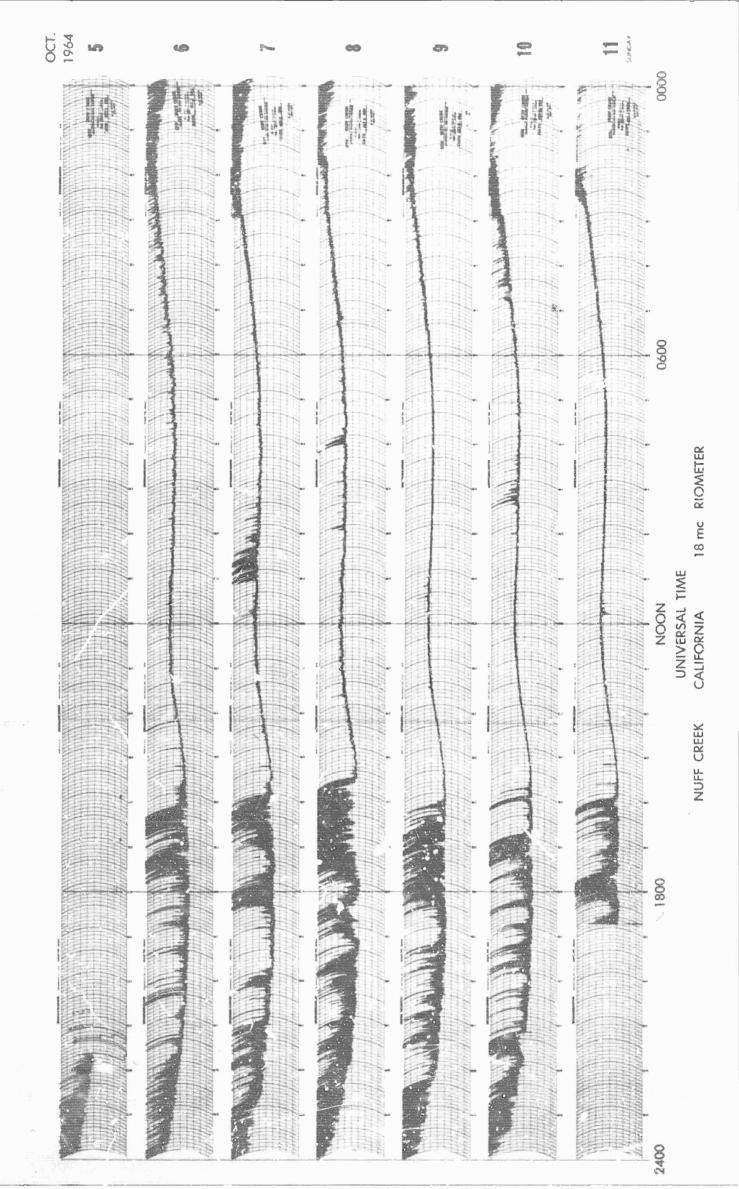


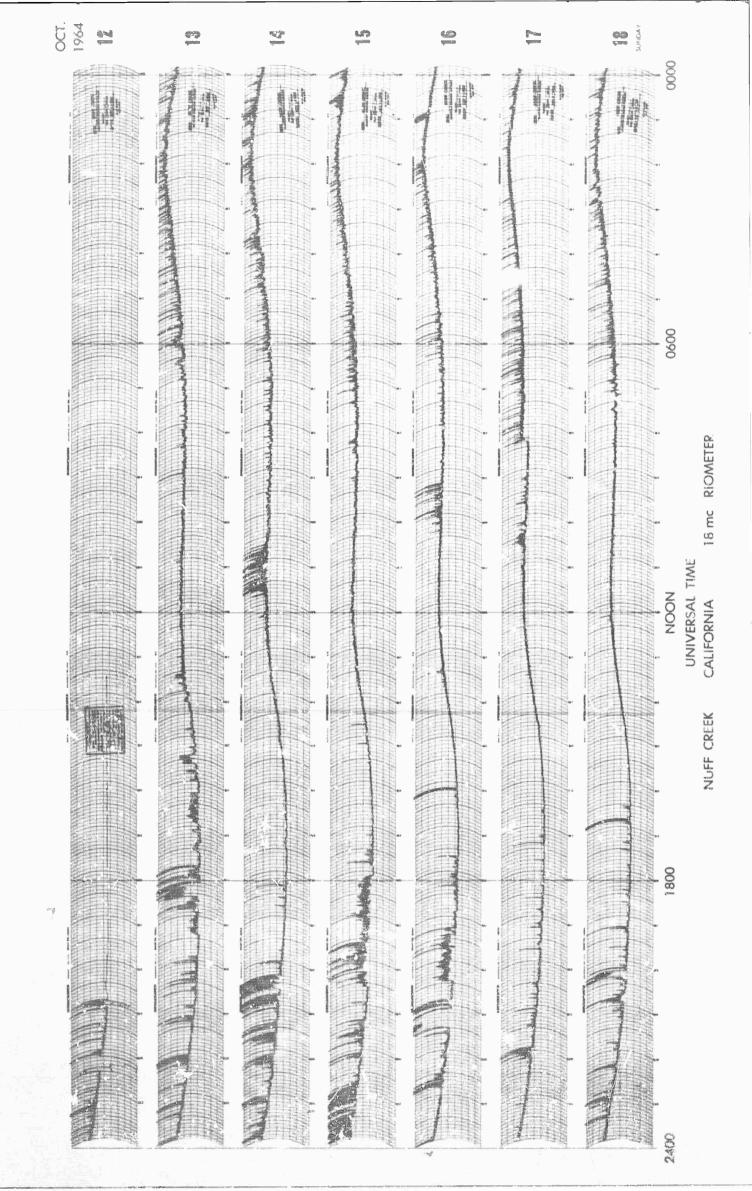


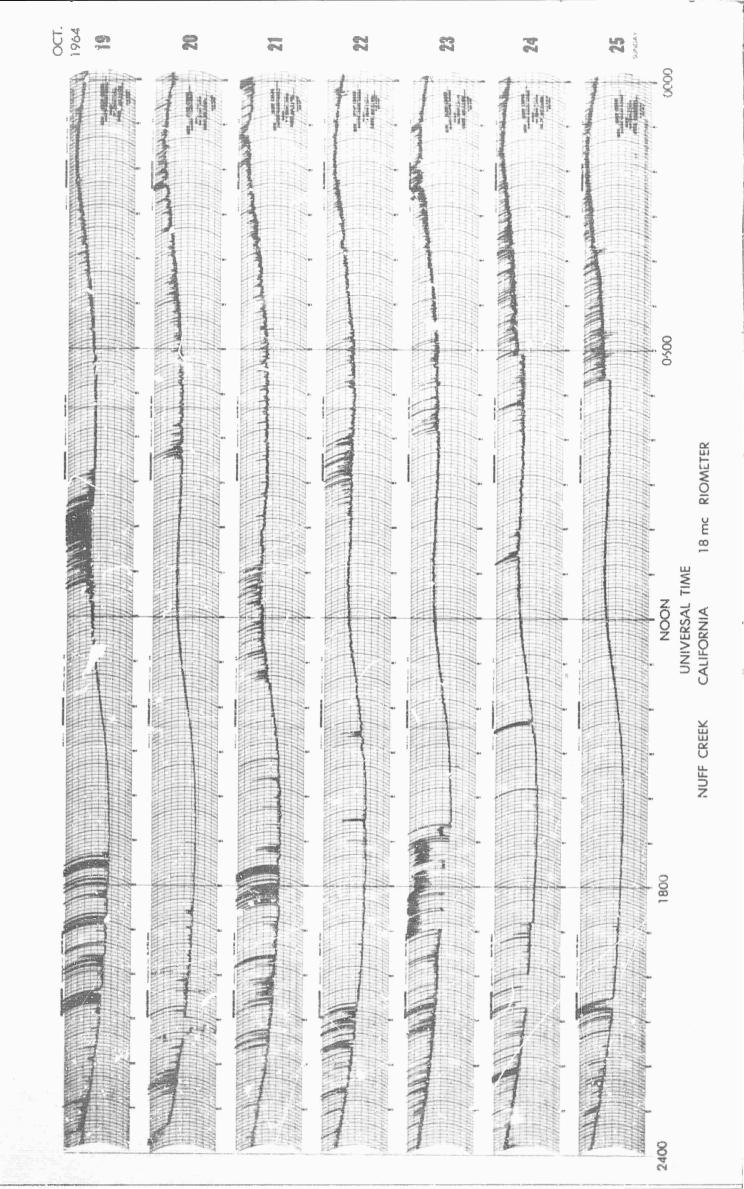


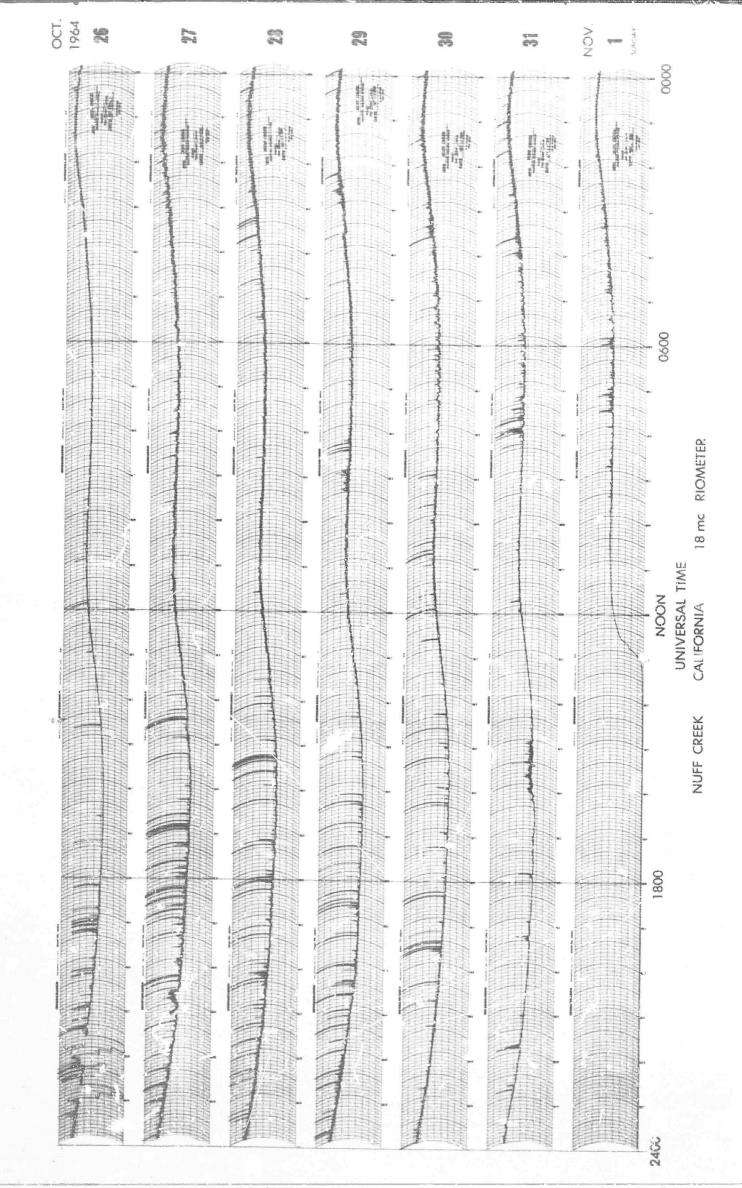


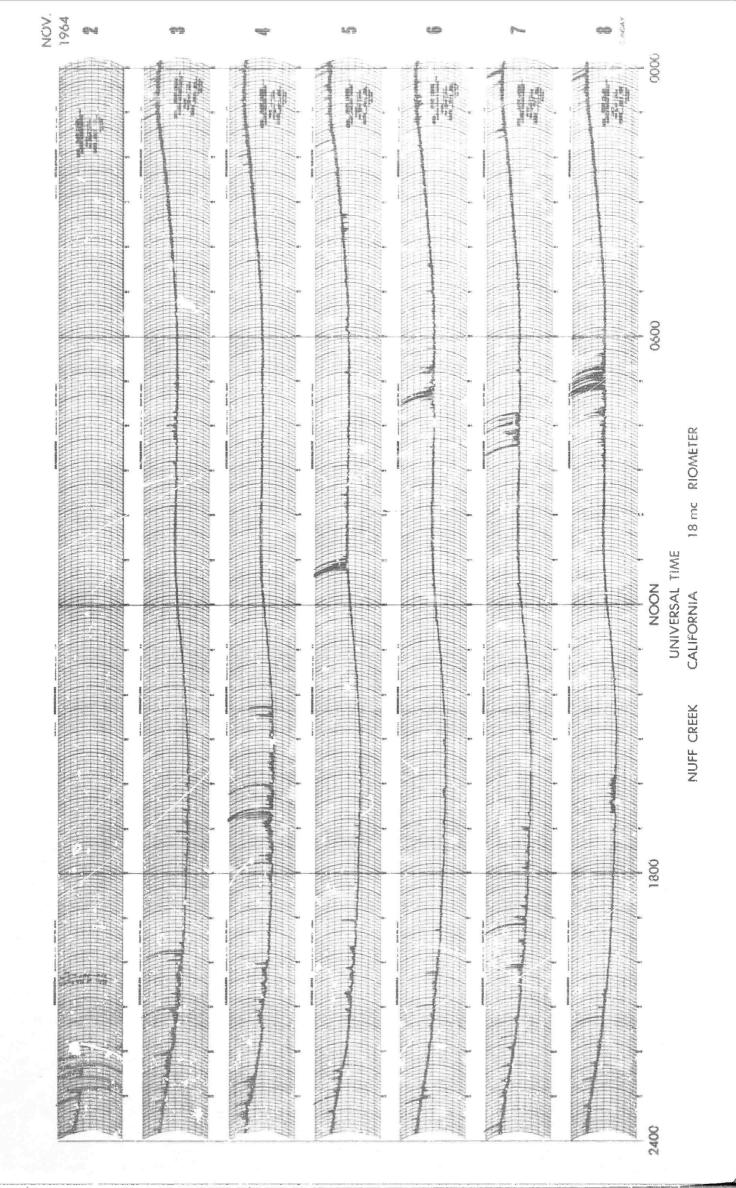


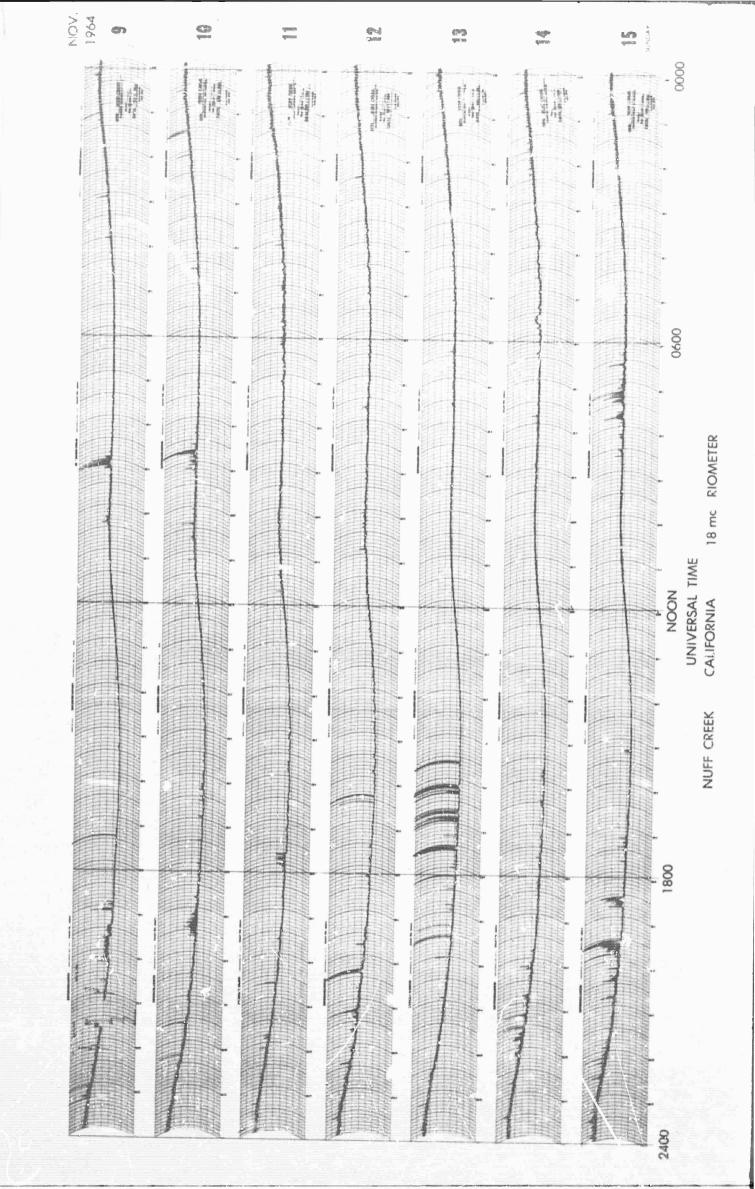


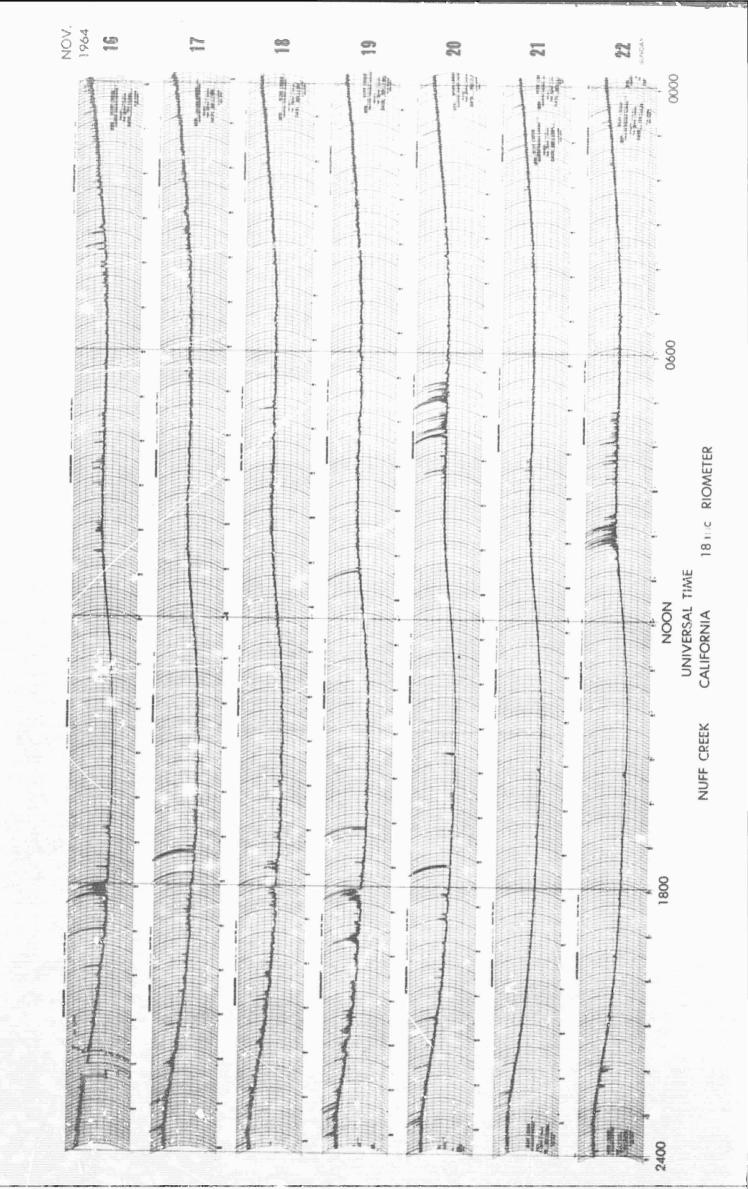


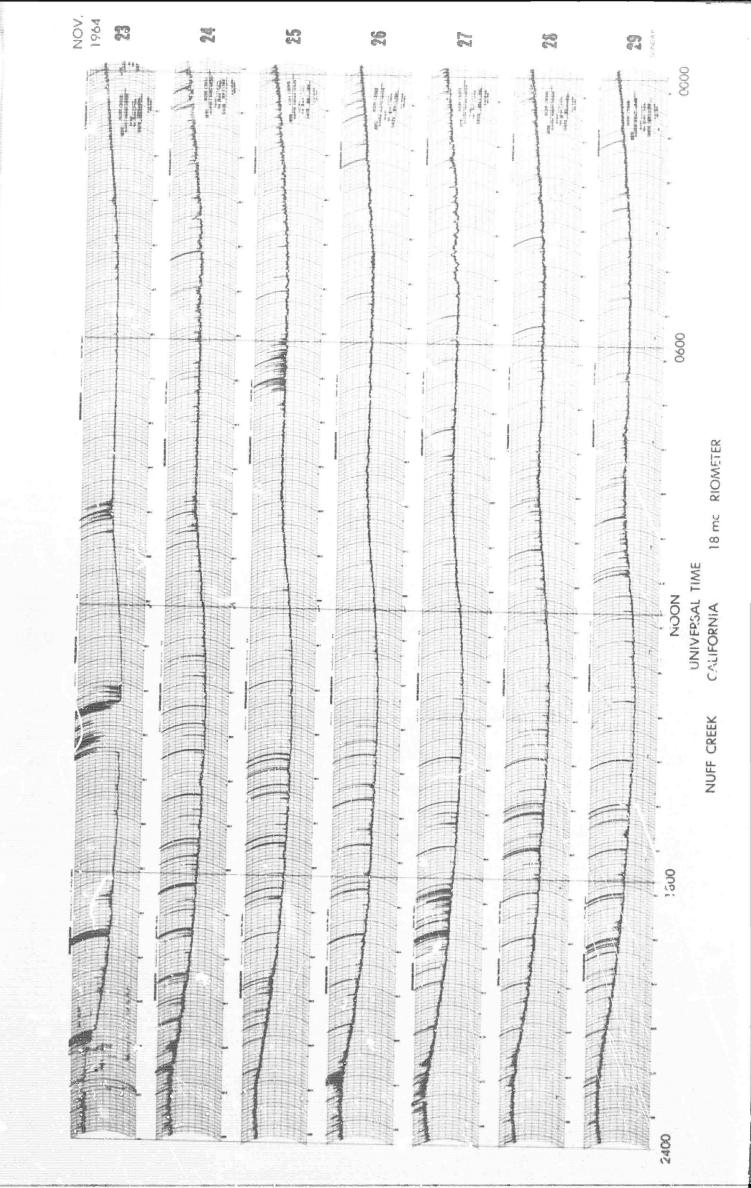


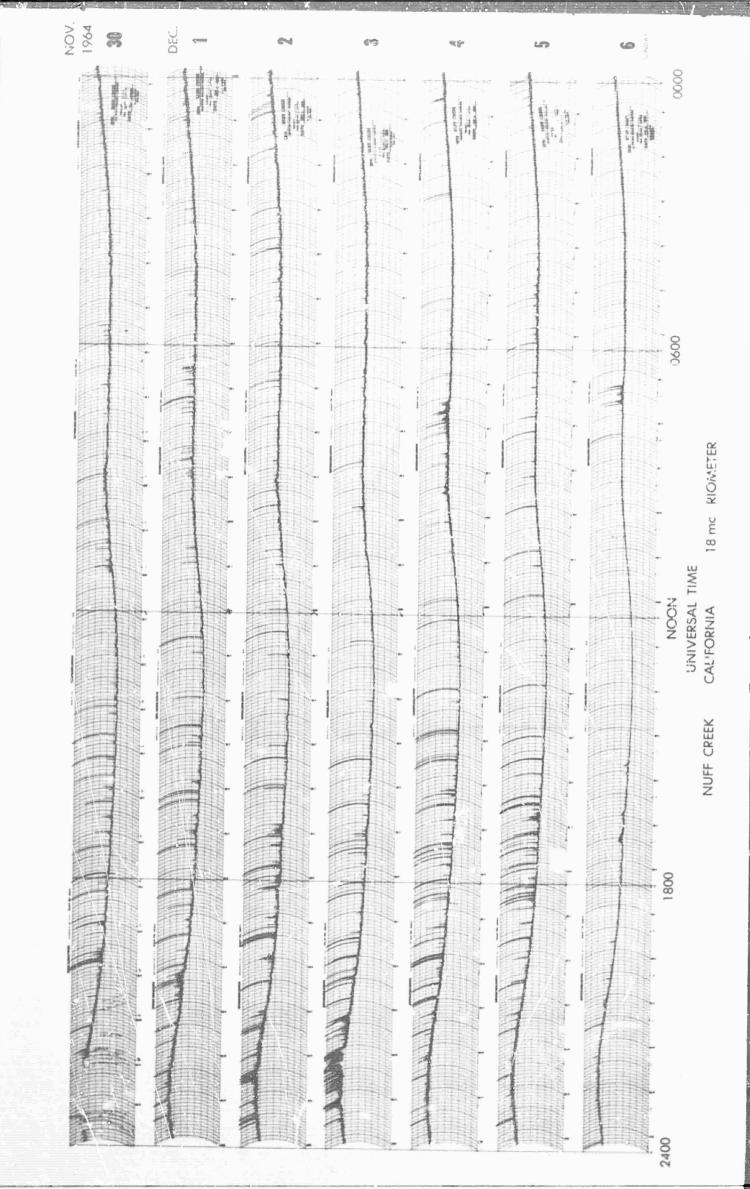

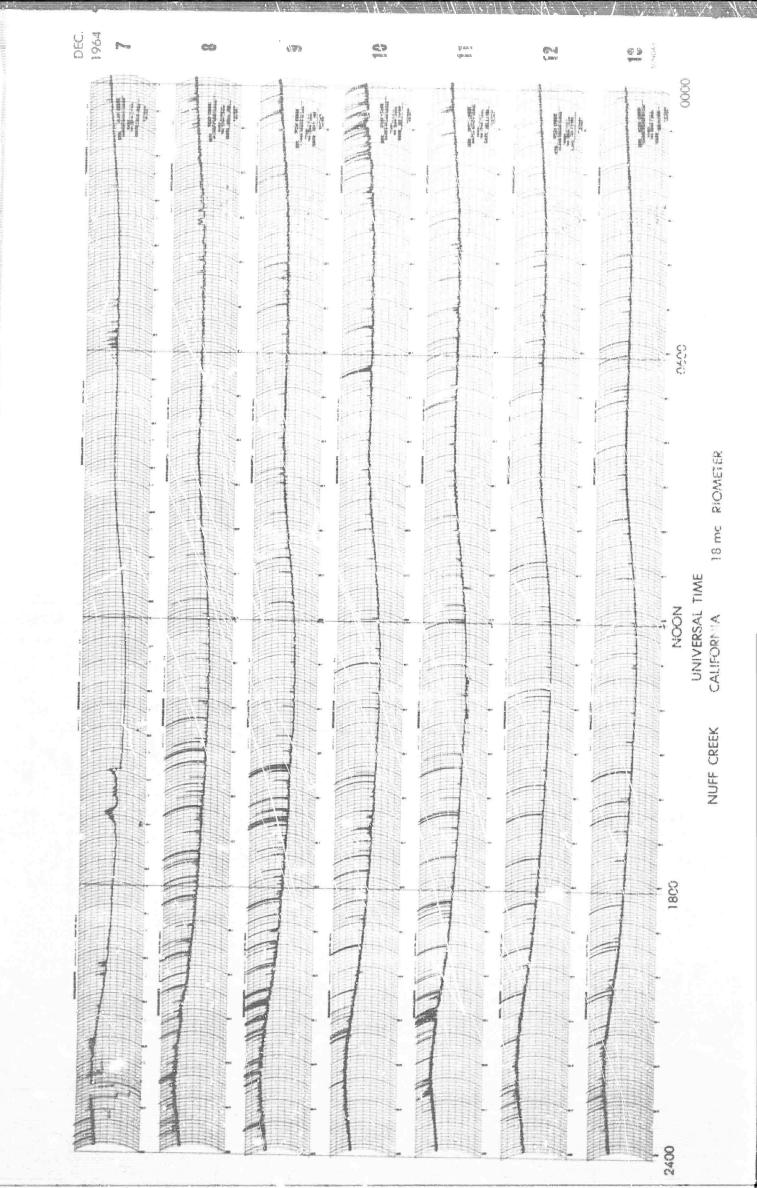

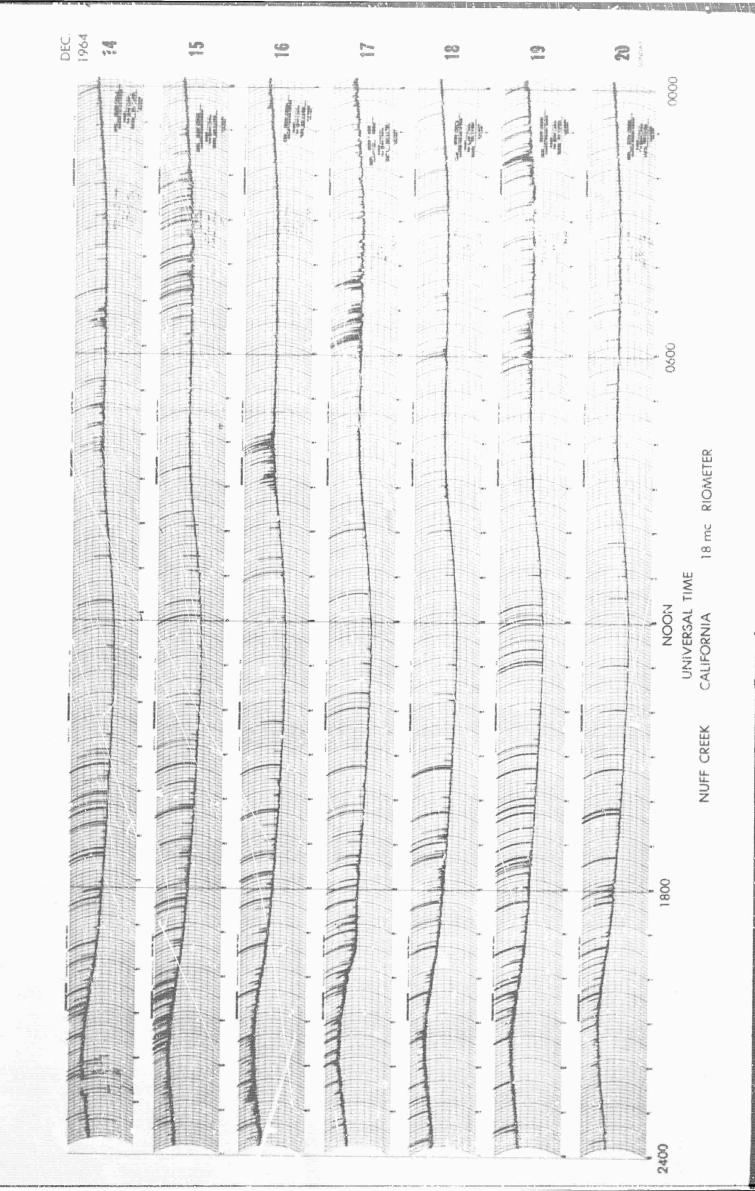

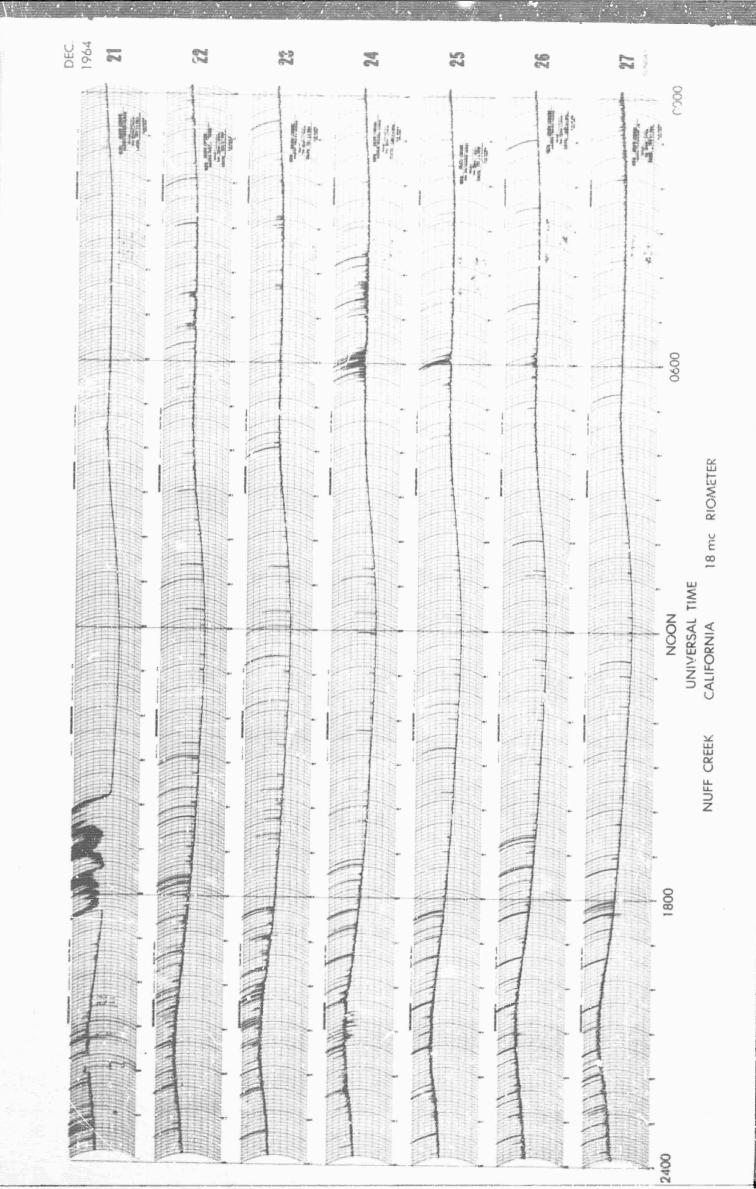

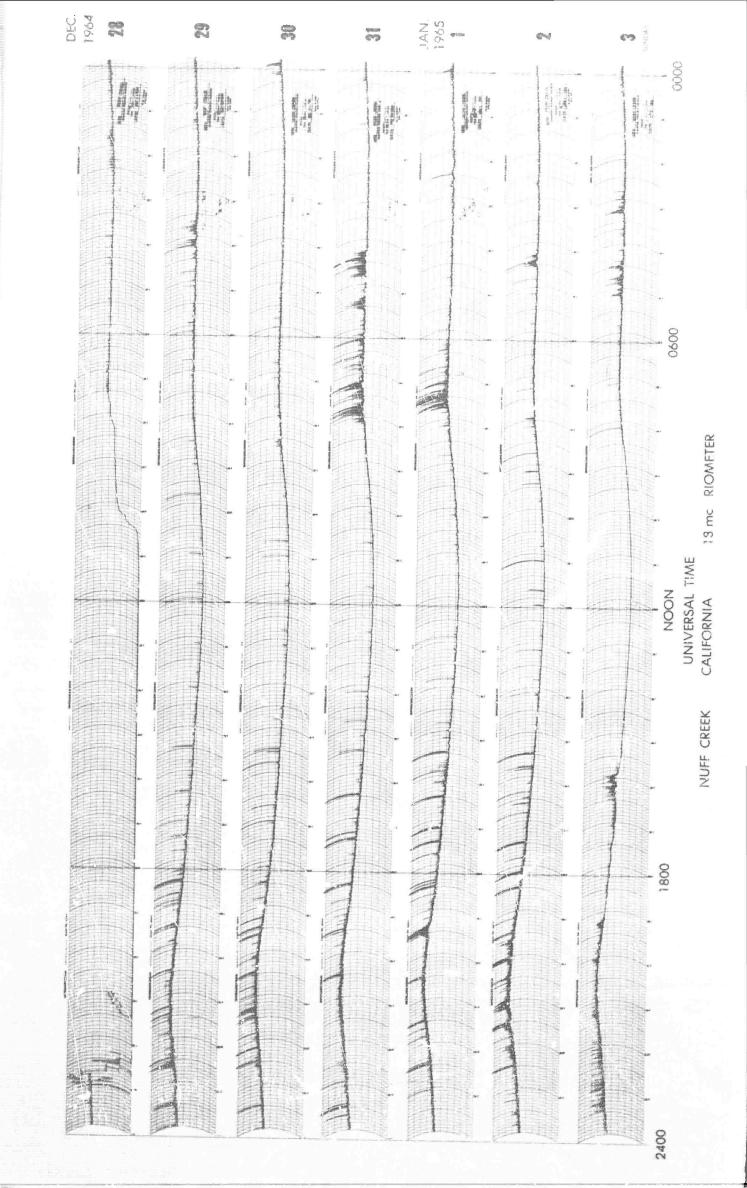

STANFORD RESEARCH INSTITUTE

MENLO PARK CALIFORNIA

Regional Offices and Laboratories

Southern California Laboratories 820 Mission Street South Pasadena, California 1331

Washington Office 808–17th Street, N.W. Washington, D.C. 20006

New York Office 270 Park Avenue, Room 1770 New York, New York 10017

Detroit Office 1025 East Maple Road Birmingham, Michigan 48011

European Office Pelikanstrasse 37 Zurich 1, Switzerland

Japan Office
Nomura Security Building, 6th Floor
1-1 Nihonbashidori, Chuo-ku
Tokyo, Japan

Retained Representatives

Toronto, Ontario, Canada Cyril A. Ing 67 Yonge Street, Room 710 Toronto 1, Ontario, Canada

Milan, Italy Lorenzo Franceschini Via Mecedonio Melloni, 49 Milan, Italy